Volvo Retail Sustainable Experience (VRSE) Showroom Concept

Aftersales - Room Datasheets

Generic VRSE Concept
VCI Equivalent (VRSE) Specification

Version no.
2

Prepared by Meda
www.experiencemeda.com
The Granary, Church Lane
Steventon, Oxfordshire
OX13 6SW

Issued by Volvo Car Ireland.
For additional copies of this Datasheet,
a copy of the Outline Specifications
or to report any discrepancy, please
email james@experiencemeda.com

VOLVO

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

Contents

5.1
Introduction to the Aftersales Specifications

5.2
Workshop Specifications
Comprising:

5.2.1 Generic Planning Principles:
5.2.1.1 Layout: Site Areas
5.2.1.2 Layout: Ground and First Floors
5.2.1.3 Floor finishes: Ground and First Floor
5.2.1.4 Ceiling finishes: Ground and First Floor
5.2.1.5 External Finishes
5.2.1.6 Internal Finishes and Fixtures:
- A. General specifications
- B1. Walls and Floors
- B2. Ceilings and customer-facing areas
- B3. Miscellaneous items.

5.2.2 Bays:
5.2.2.1 VPS Bay (two Technicians per Bay):
- A. Wall Details
- B. Standard Bay details
- C. Wall Sockets Mounting
- D. Firestation-type Bay details
- E. Detail and Finishes

5.2.2.2 Support Bay - Andon Bay
5.2.2.3 Traditional Bay (one Technician per Bay)
5.2.2.4 Laser Wheel Alignment Bay
5.2.2.5 E.V. Bay
5.2.2.6 Tyre Tread Depth and Alignment Reader
5.2.2.7 Photography Bay
5.2.2.8 Wet Valet Bay and Store
5.2.2.9 Dry Valet Bay and Store
5.2.2.10 Smart Repair and Alloy Wheel Repair Bay.

5.2.3 Areas:
5.2.3.1 Tyre Fitting.

5.2.4 Equipment Store:
5.2.4.1 Special, Hybrid and General Tools.

5.2.5 Rooms:
5.2.5.1 Service Customer Meeting Point
5.2.5.2 Service Managers' Office
5.2.5.3 Workshop Support Office
5.2.5.4 Technicians Facilities
5.2.5.5 Locker Room / Areas
5.2.5.6 Parts Store
5.2.5.7 Parts Issuance, Trade Parts, Overnight Delivery, Waste
5.2.5.8 Back of House Staircase
5.2.5.9 Plant Room

Section 5.1

Introduction

Aftersales

Do not scale from these drawings

Outline Specifications Datasheets

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda



Introduction

Supporting your VRSE Retailer scheme

These Aftersales - Room Datasheets have been prepared in order to support you in the development and delivery of your VRSE Retailer scheme.

The Datasheets are intended as an 'illustrated guide' to the Areas and Rooms of the Aftersales areas and should always be read in conjunction with the Outline Specifications documents and the Outline Specifications Appendices (which can be found online.)

Please note that this document covers all aspects of the Aftersales operations in relation to Workshops and VPS (Volvo Personal Service).

For Sales operations in relation to Sales areas please refer to the Sales - Room Datasheets document.


Please note that these documents will be updated as and when required.

Always look for the Version Number for the most current issue.

All the latest Versions are available at

https://vci.medastandards.com

- Outline Specifications - New Build / Major Refurbishments
- Supplier Appendices
- Sales - Room Datasheets
- Aftersales - Room Datasheets.

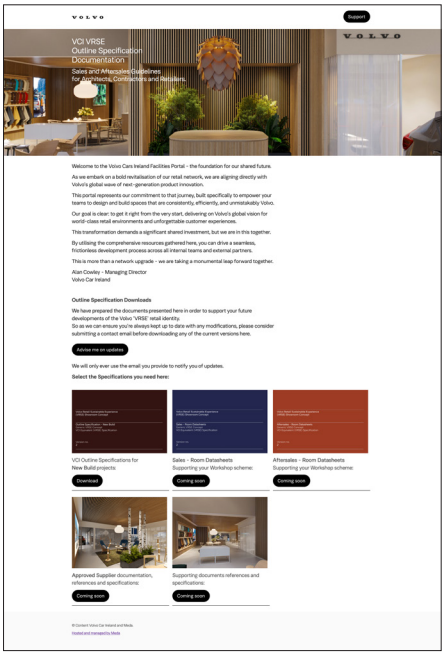

Section 5.2

Workshop Specifications Generic Planning

Datasheet 5.2.1 Generic Planning

Do not scale from these drawings


5.2.1.1 - Layout: Site Areas

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Generic layout

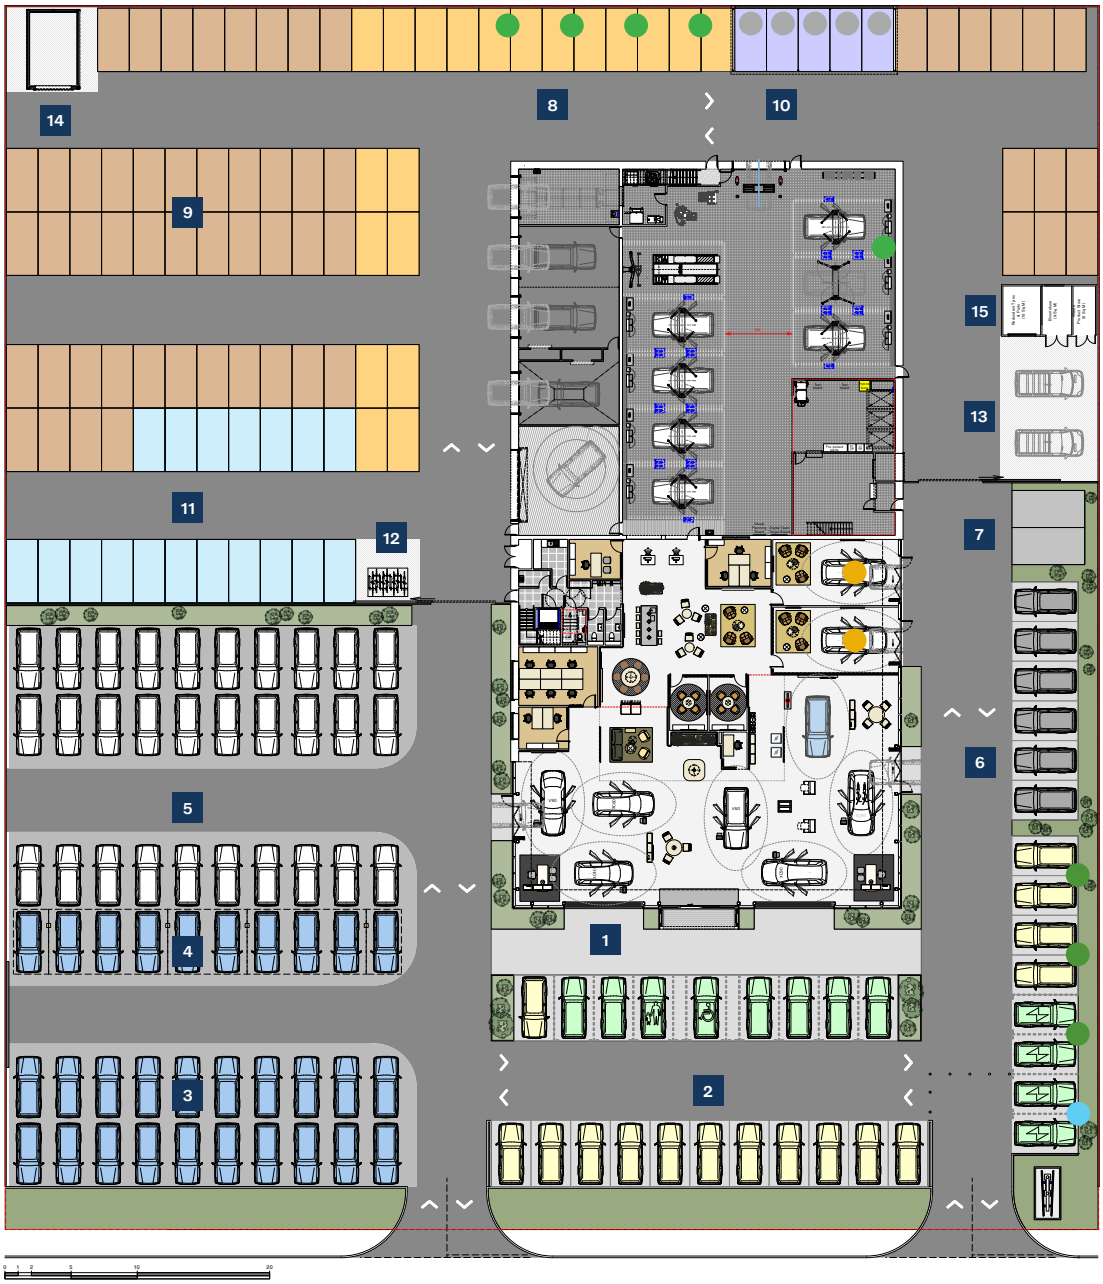

VRSE areas

This schematic site plan illustrates the required areas, bay count and generic planning principles according to the VCI VRSE programme.

Key:

1. Plaza / Customer parking bays
2. Demonstrator display bays
3. Selekt Certified Used vehicle display bays
4. Selekt Certified Used vehicle display bays under canopy
5. Non-franchise used vehicle display bays
6. Courtesy car parking bays
7. Trade parts customer parking bays
8. Service WIP bays
9. New vehicle storage bays
10. Software download bays
11. Staff parking bays
12. Cycle racks
13. Parts van parking area
14. Battery storage
15. Waste storage

Charging points key:

- 11kW
- 22kW
- 13 Amp
- 175kW DC Fast Charger

NB: Designated charging bays as per VCI VRSE Specification.

Please note that the external charging points indicated are double headed units ie: will serve 2 bays.

It is the responsibility of the Retailer to ensure that the number of charging points and total kW / Amps meet VCI mandated standards.

Datasheet 5.2.1 Generic Planning

Do not scale from these drawings


5.2.1.2 - Layout: Ground and First Floor

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**


VOLVO

Meda

NB: Please refer to the Outline Specifications for full details

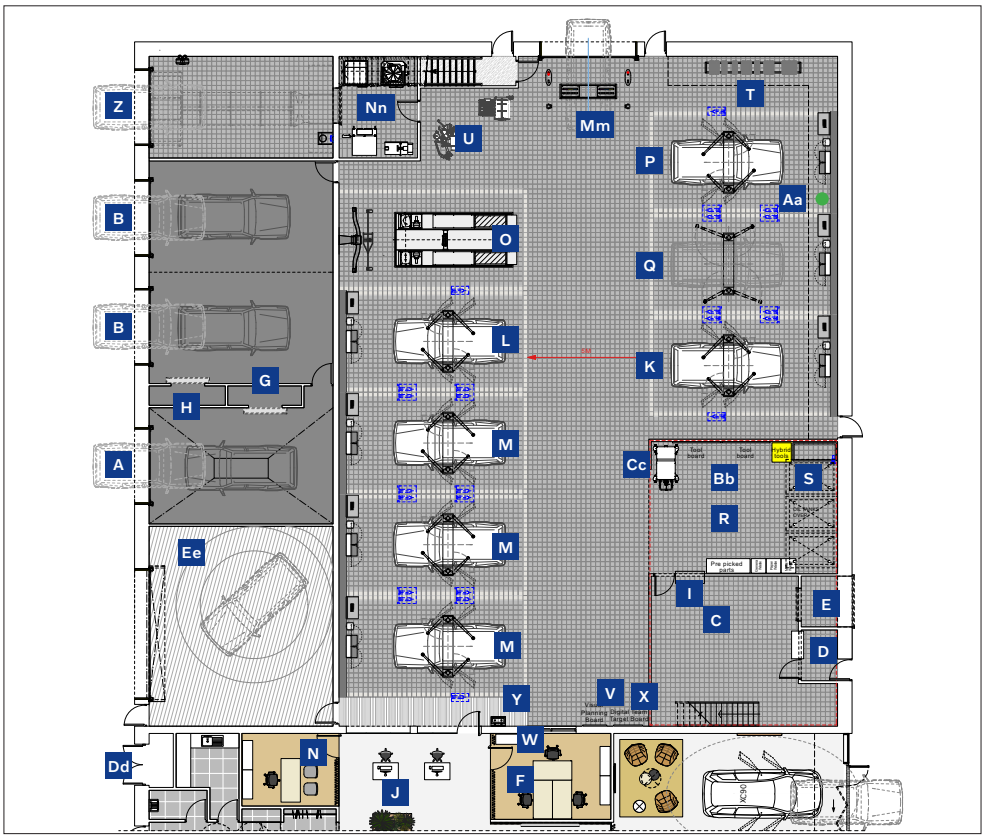

Ground floor

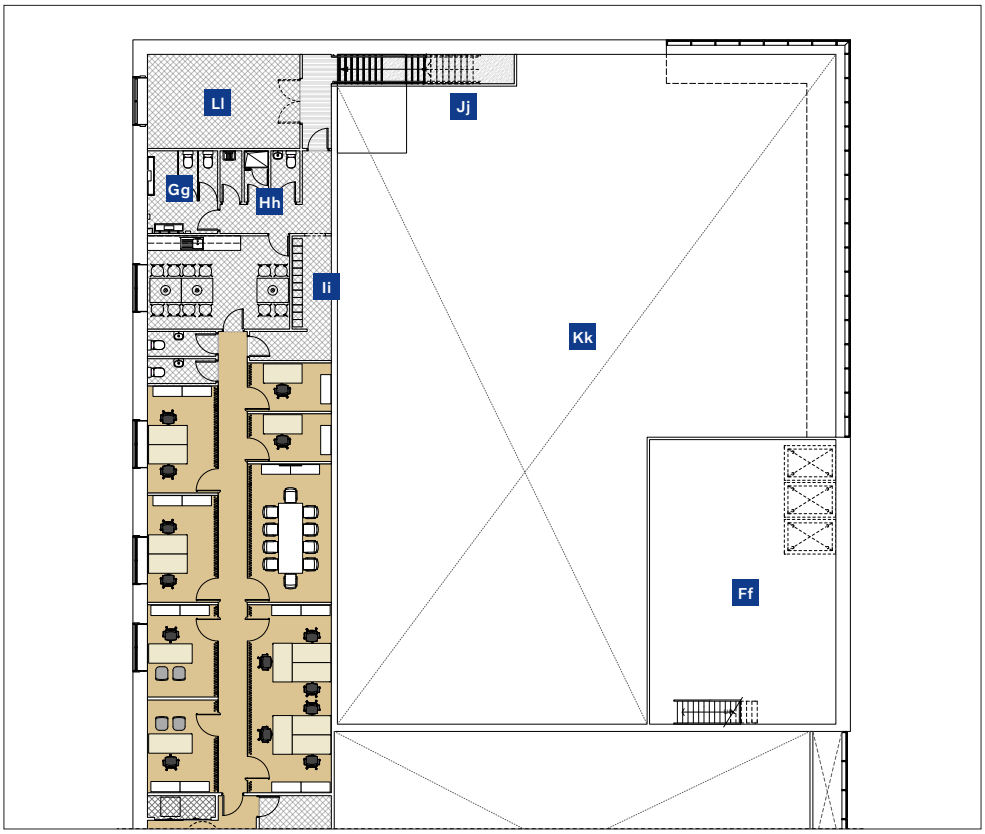

First floor

Comprising:

A. Wet Valet Bay
B. Dry Valet Bay
C. Parts
D. Parts Delivery / Trade Parts
E. Waste
F. Workshop Support Office
G. Wet Valet Store.
H. Dry Valet Store
I. Parts Issue
J. Service Customer Meeting Point
K. Traditional Bay (one Technician per Bay)
L. Support Bay
M. VPS Bay (two Technicians per bay)
N. Service Manager's Office
O. 4 Wheel Alignment Bay
P. E.V. Bay
Q. Battery Repair Bay
R. Equipment Store
S. Unit Repair
T. Tyre storage
U. Tyre Fitting Equipment
V. Team Target Board
W. Key Safe
X. Visual Planning Board
Y. Wash Trough
Z. Smart Repair
Aa. E.V. Charger
Bb. Tool Boards
Cc. Battery Lift
Dd. Services Intake
Ee. Photography Bay
Ff. Parts Mezzanine
Gg. Male Technicians facilities
Hh. Female Technicians facilities
Ii. Lockers
Jj. Staff staircase from workshop
Kk. Workshop ceiling void
Ll. Plant Room
Mm. Body scanner / Tyre tread depth reader / Wheel alignment
Nn. Alloy wheel repair

Charging points key:

● 22kw

Datasheet 5.2.1 Generic Planning

Do not scale from these drawings


5.2.1.3 - Floor finishes: Ground and First Floor

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**


VOLVO

Meda

NB: Please refer to the Outline Specifications for full details

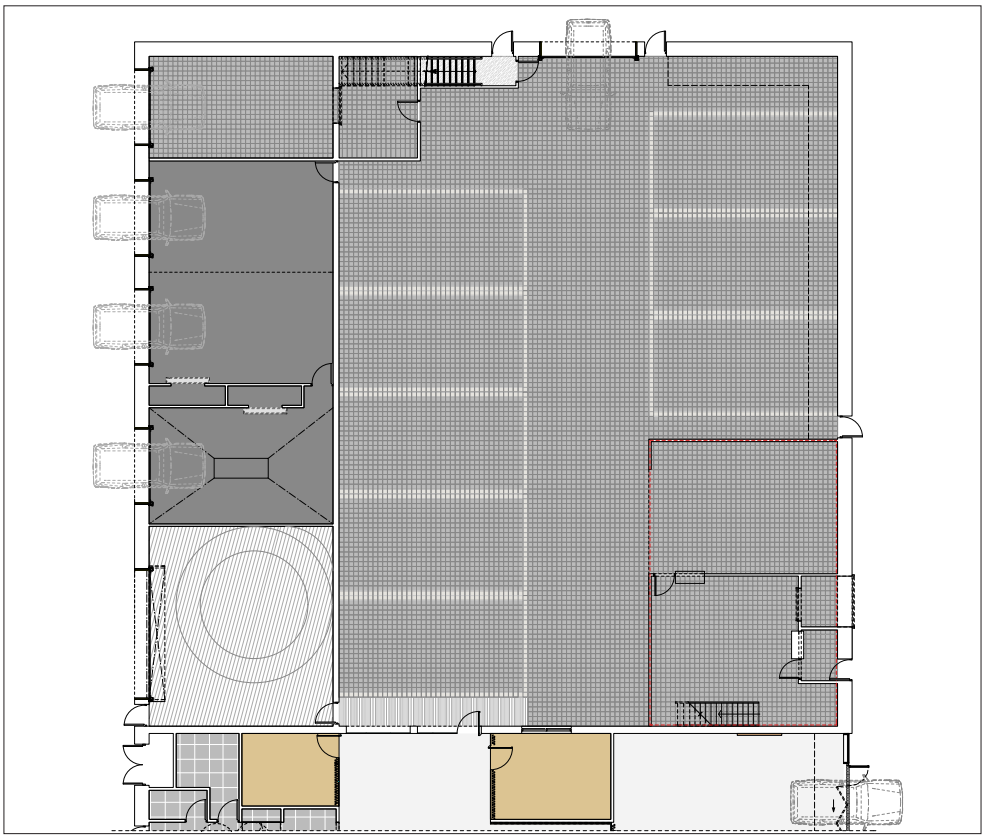

Ground floor

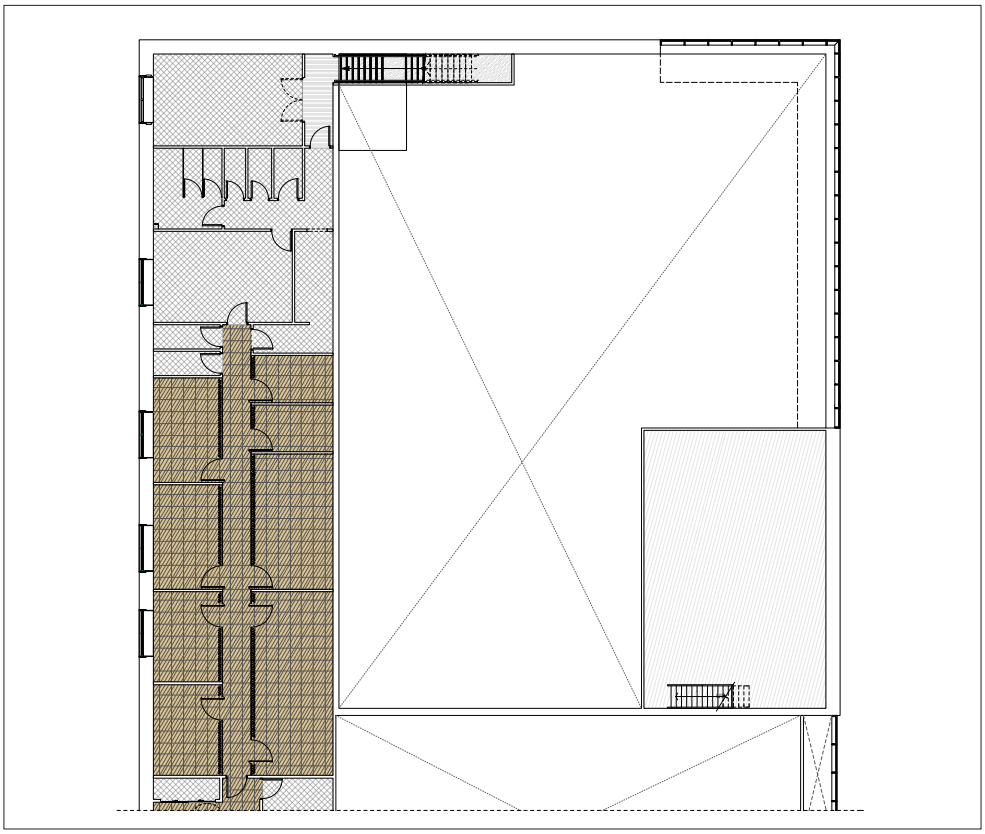

First floor

Floor finishes key:

FPC 1 - Polished concrete floor with surface treatment.

FT1 - Workshop Support, Service Managers' offices

Tretford Interlife sheet carpet – colour: 572 Milk Chocolate.

FC4 / FC5 - Workshop

200 x 200 x 12mm non-slip matt tile. Field tile: Marazzi SistemT 'Grigio Scuro'

Bay demarcation: Marazzi SistemT 'Panne'.

FP2 - Stores and Valet

Epoxy floor non-slip finish with coved skirtings to match.

Colour: to match RAL 7037 Dusty Grey.

FC3 - Staff Canteen and Technicians Facilities.

Porcelain tile with coved skirtings to match.

Colour: to match RAL 7037 Dusty Grey.

FV1 - Stores

Non-slip sheet vinyl with coved skirtings to match.

Colour: Light -grey.

FP3 - Staircase from workshop to first floor.

Galvanised chequer plate.

FD1 - Walkway to workshop

Aluminium framed internal mat with black textile brush strips and anthracite anodised aluminium recessed edge strip.

Datasheet 5.2.1 Generic Planning

Do not scale from these drawings


5.2.1.4 - Ceiling finishes: Ground and First Floor

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**


VOLVO

Meda

NB: Please refer to the Outline Specifications for full details

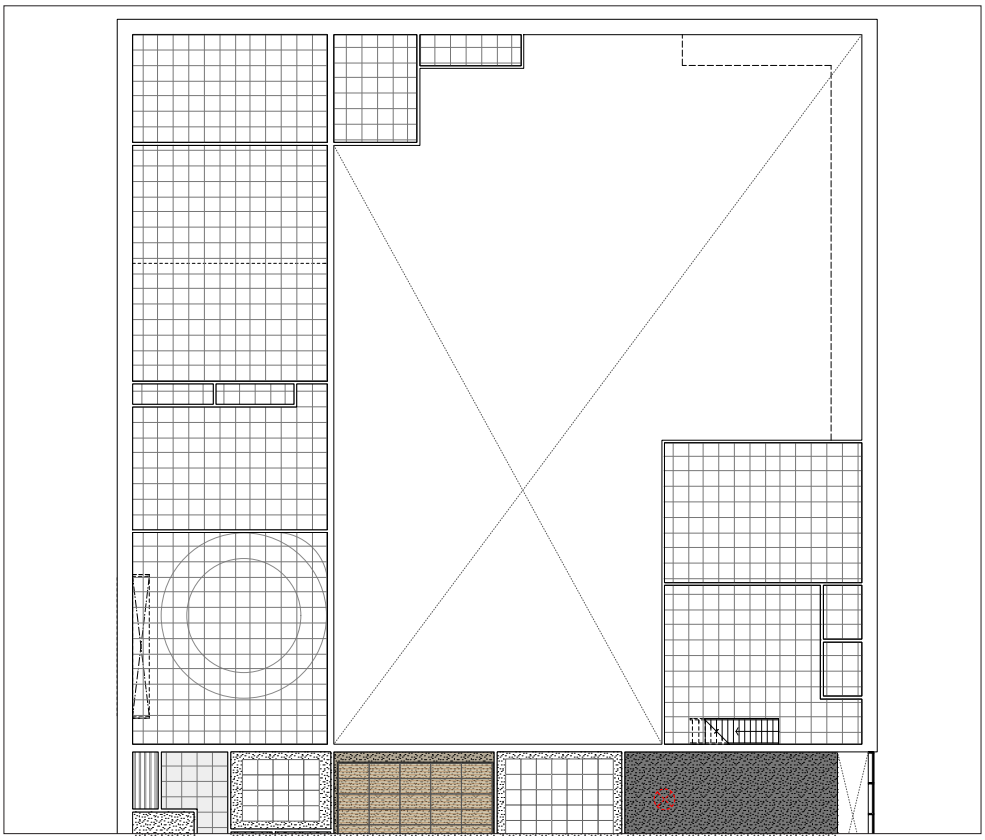

Ground floor

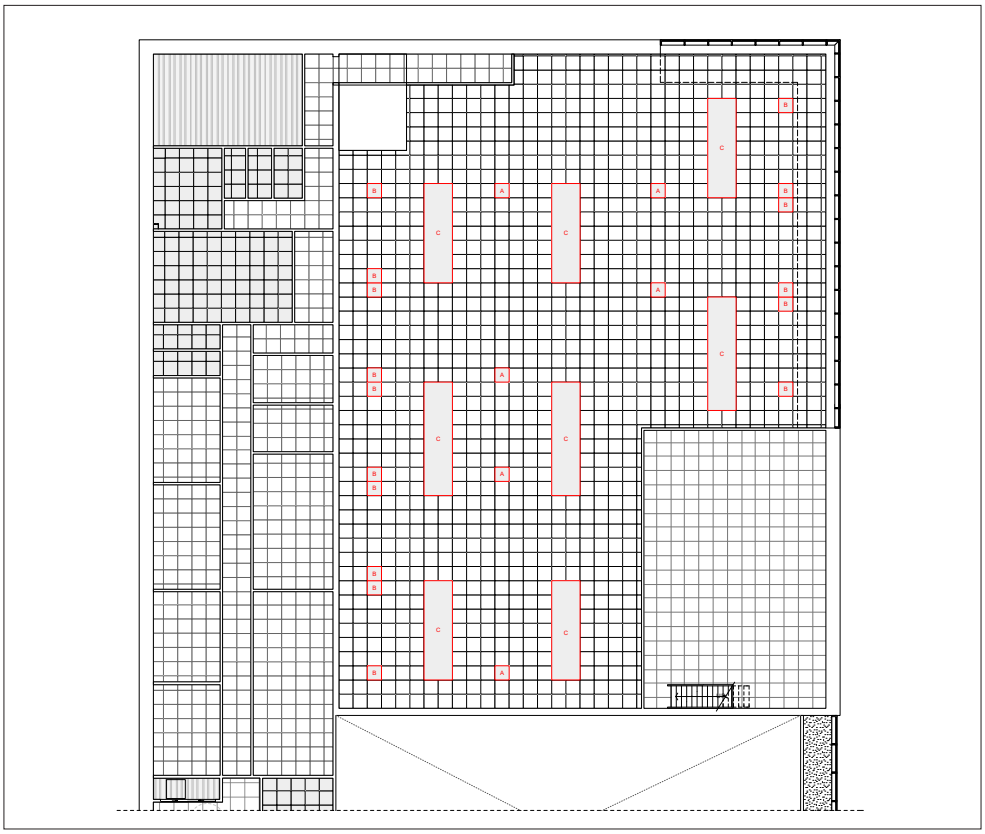

First floor

Ceiling finishes key::

CS6 - Service Customer Meeting Points

Proprietary 600 x 1,200mm lay in timber ceiling in real wood 'Ash' ribs.

CS4 - Service Manager / Workshop Support Offices

600 x 600mm RAL 9003 white tile reveal edge, tegular tile. Ceiling grid in white PPC 15mm tee. Ceiling margins where shown to achieve full tile ceiling grids symmetrically set out within the room should be finished as (CS1) painted MF gypsum ceiling. Matt finish to RAL 9003 Signal White.

CT3 - Workshop including all Workshop Stores

'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system. Clipped tiles throughout. Standard white.

CT1 - Stores, Canteens and Techs facilities including Staff and Tech toilets

Suspended 600 x 600mm ceiling tile - 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system.

Comprising:

A. 600 x 600mm opening with grille and reinforced grid for exhaust extract hoses (reels in void)

B. As above, for oil, air and water service hoses (cassettes in void)

C. Openings to match ambirad heating in void (proximity distances to manufacturers recommendations) with reinforced grid and heat-resistant grille for radiant heat transfer.

Datasheet 5.2.1 Generic Planning

Do not scale from these drawings

5.2.1.5 - External Finishes

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**


VOLVO

Meda

For all external specification options please refer to the Outline Specifications documents.

Glazing






Curtain wall

Proprietary aluminium frame, clear double glazed curtain wall system with 1,000mm wide modular frame width with external caps to be RAL 9006 White Aluminium.

Cladding





Cladding to workshop areas

External elevations on the Aftersales / Workshop areas to be proprietary 1,000mm wide insulated composite cladding system, vertically fixed on cladding rails, finished to RAL 9006 White Aluminium.

Vehicle access doors



Vehicle access doors for workshop and valet bays

Min 3,500mm wide x 3,000mm high opening, electrically operated or equivalent fast-lift double skin steel roller or high lift shutter door.

Door colour, trimming steel and frame decorated RAL 9006 White Aluminium.

Perimeter treatment



Bollards

Minimum 90mm diameter 750mm high stainless-steel post bollard set in concrete – including within apron paving at external corners of glazing /cladding, at pedestrian workshop entrances, vehicle entrances and entrances to the site.

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO
Meda

NB: Please refer to the Outline Specifications for full details

VRSE / VPS Workshop Finishes

Workshop generic finishes, which also cover the following areas unless specified in the Datasheet:

5.2.2.1 VPS Bay A, B and **C**

5.2.2.2 Support Bay

5.2.2.3 Traditional Bay - 2-Post

5.2.2.4 Laser Wheel Alignment Bay

5.2.2.5 E.V. Bay

5.2.2.6 Tyre Tread Depth Reader.

Please note: for external finishes relating to Aftersales areas, including building finishes and hard landscaping, please refer to the Sales - Room Datasheets document.

Ceiling

CT3 - 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system, clipped tiles throughout. Standard white.

Walls (up to 2400mm in height)

200 x 200mm grey wall tile, matt. Grey grout (min 2,400mm high).

Marazzi SistemC 'Citta Grey'.

Walls (above 2400mm in height)

Workshop walls above tiles – washable semi gloss paint to fair face blockwork or dry-lining – RAL 9003 Signal White.

Floor Tiles

Main floor tiles – 12mm 200 x 200mm matt dark grey non-slip tile. Grey grout.

Marazzi SistemT 'Grigio Scuro'.

Bay Demarcation Tile

12mm 200 x 200mm light grey matt tile. Grey grout.

Marazzi SistemT 'Panne'.

Parts Stores and Valet

2-pack Epoxy floor treatment: 'Monarcoat 720' or similar in non-slip finish to RAL 7037 Dusty Grey.

Barrier Matting

Recessed Heavy Duty Matting (internally) between Workshop and Service Customer Meeting Point.

Aluminium framed internal mat with black textile brush strips and anthracite anodised aluminium recessed edge strip.

Aftersales Stairs

FP3 - Chequer Plates to floor Aftersales stairs. Galvanised finish retained.
NB: Allow for anti-slip and safety strips to all thread edges.

Lighting

Workshop lighting shall be recessed or suspended, sealed LED fittings with average luminance of 750lux at 850mm AFFL – with not less than 1,000lux at car bonnet level.

Colour temperature should be 4,000 - 4,200K.

Minimum CRI 90.

The lighting shall be switched and controlled from a central switch control position.

Please refer to supplier appendices for VCI approved lighting supplier / specification.

Heating

Heated by gas-fired, black heat, tubular radiant heaters (Ambi-Rad AR Series or regulated hot-air blowers, or equivalent) mounted at high level preferred.

Ceiling grilles below ambirads to allow heat transfer.

Sanitaryware

Tech toilets and Workshop – 'Armitage Shanks' WC and basins, including wash trough. See also Section 3.1.2 in Outline Specifications for full details.

Workshop Equipment

Generally Operators' choice, matching

Desks, chairs, storage units etc. in accordance with furniture plans procured by Operators' own supplier.

Operator's choice of supplier for Workshop equipment in accordance with Layout plans and VPS guidelines.

VPS bays to have in-ground fully recessed cassette ramps, installed to manufacturers recommendations and ducted supplies with isolator control built into VPS wall.

Traditional / Andon bay to have 2 post ramp installed to manufacturers recommendations and ideally supplies ducted in slab (overhead power supply only by exception) with isolator control built into VPS wall.

EV Battery service requires 4T 2 post ramp installed to manufacturers recommendations and ideally supplies ducted in slab with EV charger and isolator control built into VPS wall.

Battery/Flat bay should provide a flat working surface without a ramp located adjacent to the EV bay (if a ramp is installed in this bay, it must have retractable swing arms or in ground cassette so that there is no obstruction to manoeuvring the mobile battery lift for unimpeded working space between the EV and Battery bays). The battery bays similarly to include VPS wall and tool storage.

Battery lift – mobile lifting battery jack with 1,300 x 768mm table size (base frame 1,400 x 1,055mm) and 1,000kg capacity to 1,800mm lifting height (1,320mm usable height.)

Diagnostic tyre tread and wheel align reader at workshop entrance with recess in slab and concealed ducting for services and with data connection to Service reception area.

Oil, air and water reels to be suspended from soffit with hoses located to the front axle position of the Bays.

Equipment storage; Minimum standard of 50m2 – comprising Min 36m2 unrestricted, open storage with a min 1,800mm wide clear opening access on level floor. Unit repair in this area; Min 4m2. Tyre change and balancing in this area; Min 6m2 and finally, the Battery trolley stowed in this area; Min 4m2.

VPS wall units - supplied as Parts Ordering System - modular units including shelf and tool storage etc. Panels RAL 7004 40 gloss, Dupont 16-40. See Aftersales Datasheets for construction and set out.

Datasheet 5.2.1 Generic Planning

Do not scale from these drawings

5.2.1.6 - Internal Finishes and Fixtures - B1

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

NB: Please refer to the Outline Specifications for full details

Floor finishes



FC4 - Ceramic Tile
General Floor tiles – 200 X 200 X 12mm matt mid-grey non slip tile.
Grey grout.
Marazzi SistemT 'Grigio Scuro'.

FC5 - Ceramic Tile
Bay demarcation tiles – 200 X 200 X 12mm matt light grey non slip tile.
Grey grout.
Marazzi SistemT 'Panne'.




FC3 - Staff Canteen, Staff Toilets and Technicians Facilities.
Porcelain tile with coved skirtings to match.
Colour: Mid-grey.




FP2 - Stores and Valet
2-pack Epoxy floor treatment 'Monarcoat 720' or similar in non slip finish to RAL 7037 Dusty Grey.
Note: Light grey option required for the photo booth to suit retailer requirements.



FV1 - Vinyl Safety Flooring
Non-slip 2.5mm sheet vinyl with coved skirtings.
Colour: mid-grey.



FP3 - Chequer Plates To Staircases
Back-of-house stairs - Galvanised finish retained.
NB: Allow for ant-slip and safety strips to all tread edges.



FD1 - Entrance Matting (Internal)
FD1 - Internal entrance mat Aluminium framed internal mat with black textile brush strips and anthracite anodised aluminium recessed edge strip.



FD3 - Heavy duty carpet
Colour: Anthracite.

Wall finishes

P1 - Paint to walls generally unless specified otherwise and in non customer-facing areas
Plasterboard walls and exposed steels decorated in emulsion paint matt finish.
RAL 9003 Signal White.

P2 - Paint To Joinery (to offices)
Painted joinery decorated in gloss paint semi matt finish.
RAL 9003 Signal White.

P3 - Paint To Walls above 2,400mm
Washable eggshell paint to drylining finished to RAL 9003 Signal White.



P4 - Paint to walls up to 2,400mm
Washable eggshell paint to drylining to RAL 7037 Dusty Grey.

M1 - Wall Tiling
Staff Canteen splash backs and Technicians Facilities.
200 X 200mm white wall tile, matt.
White grout.



M2 - Wall Tiling
Workshop walls - 200 x 200mm grey wall tile, matt.
Marazzi SistemC 'Citta Grey'.



IPS - Full Height Laminated Panelling
To conceal services and cisterns on rear wall of non customer-facing toilets. Finish: laminate Abet 870 Grey.



VPS - Volvo Modular Wall To Specialist Details
Colour: RAL 7004, 40-gloss.


NB:
Proprietary, Parts Stores and Dry Valet areas - P4 grey paint up to 2400mm high (unless indicated to be tiled), and P3 washable white paint above.

Skirtings finishes

VS2 - Skirting Tiles
Circulation, Customer Toilets and Kitchen tiled areas - 90mm skirting tiles.
RAL 9003 Signal White.



VS3 - Skirting Tiles
Workshop tiled areas 200 X 100 X 12mm matt mid-grey skirting tile, coved angle / edge tiles.
Marazzi SistemT 200 x 100mm sit-on skirting tile 'Grigio Scuro'.



VS4 - Skirting Vinyl
Non-slip 2.5mm sheet vinyl coved skirtings.
Colour: mid-grey.

Datasheet 5.2.1 Generic Planning

Do not scale from these drawings

5.2.1.6 - Internal Finishes and Fixtures - B2

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

NB: Please refer to the Outline Specifications for full details

Ceiling finishes



CT1 - Stores, and Techs facilities including Tech toilets

Suspended ceiling tile - 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system.

Standard white.



CT3 - Workshop areas

'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system. Clipped system throughout. Standard white.

Standard white.

Paint To Soffit

To back of house areas -

Non-brand specified emulsion paint to underside of slabs.

Finish: Vinyl silk. RAL 9003 Signal White.



CM1 - Self-Finish (u/s of Metal Deck Flooring)


Underside of metal deck

flooring - Self-finish retained

Can be painted White emulsion finish, RAL 9003 Signal White is required, Intumescent paint to all exposed steelwork, Colour: White.


Showroom Areas

Floor finishes



FPC1 - Living Room areas

Polished concrete floor with surface treatment.



FT1 - Service Manager and Workshop Support offices

Tretford Interlife sheet carpet – colour: 572 Milk Chocolate.



FC3 - Staff Canteen and Technicians Facilities

Porcelain tile with coved skirtings to match.

Colour: Mid-grey.

Wall finishes

P1 - Paint to walls generally unless specified otherwise and in non customer-facing areas


Plasterboard walls and exposed steels decorated in emulsion paint matt finish. RAL 9003 Signal White.

P1B - Paint to walls in Consultation Rooms, Sales Consultants and Managers' offices

Matt paint finish to RAL 7047 Telegrey.

All skirtings and joinery in semi-gloss paint finish to match as appropriate.

Ceiling finishes




CS4 - Service Manager and Workshop Support Offices

'Zentia Prestige' or similar 600 x 600 tegular tile. Matt finish to RAL 9003 Signal White, grid in white PPC 15mm tee.

Ceiling margins where shown to achieve full tile ceiling grids symmetrically set out within the room should be finished as (CS1) painted MF gypsum ceiling.


Matt finish to RAL 9003 Signal White.



CS6 - The Living Room areas

Proprietary 600 x 1,200mm lay in timber ceiling in real wood 'Ash' ribs at 20mm thick x 40mm deep and 30mm spacing gap.

Lay in timber ceiling to be supplied by VCI approved supplier only.



P3 Living area soffit behind open ceilings

Ceiling (and all services / ducts) to be painted to RAL 9005 Jet Black matt finish.

or

Black fabric mesh stapled to the back of the battens.


Glazing finishes



V1. Service Manager and Workshop Support Offices

Proprietary 'Komfort Polar' or 'PolarTec' frameless, optical white, low iron, single-glazed screen system and glass door with ironmongery as required.

Any framing to top and base to be RAL 9003 Signal White to all faces.



GP1 - Screen walls between Showroom and Aftersales ('Viewing window')

Proprietary 'Komfort PolarTec' or 'Polar Vision' frameless, highly transparent extra clear, low iron glass, fixed vertically.

Frameless double-glazed unit for improved sound insulation may also be specified.


Door, full height glazed. Frame colour – rebated PPC white finished to RAL 9003 Signal White.

Typically fire-rated glazing is required between Sales and Aftersales.


All glazing to include manifestation.

Any framing to top and base to be RAL 9003 Signal White to all faces - workshop face to be RAL 7037 Dusty Grey.

Ironmongery










Proprietary 'D-Line' satin stainless steel 'Lever Handle L' or 'Pull Handle Straight' from the Knud Holscher collection with matching ironmongery including coat hooks, door stops and kick plates.

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO


Meda

Ramps

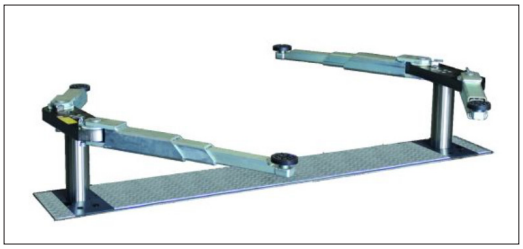

Lifting height min 1900 mm
Lifting capacity min 3000kg
Platform length min 1400 mm
max 1900 mm

In-ground Two-piston

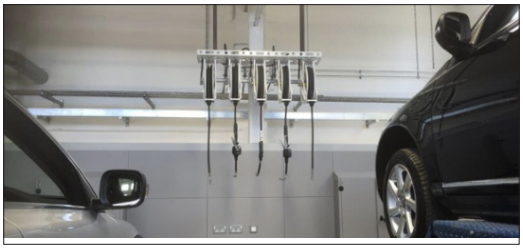

Air, Oil and Water
Air, Oil and Water (in between each bay) type - 2x Air, 1x Oil for each grade, 1x Water between each Bay. Air only - for end Bay (either left- or right-hand orientated).



NB:
1x Oil for each grade - to confirm the oil grades required please refer to, and confirm with, the VPS Implementation Team prior to specifying this equipment.

Vehicle Protection



Vehicle Protection - Wing Covers Wall-mounted type

2. Management tools

Planning



Visual Planning Board




Team Target Board

Storage



Key Safe

3. Other



Wash trough example

Datasheet 5.2.2 Bays

Do not scale from these drawings


5.2.2.1 VPS Bay - A. Wall Details

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**


VOLVO

Meda

VPS Wall Locations

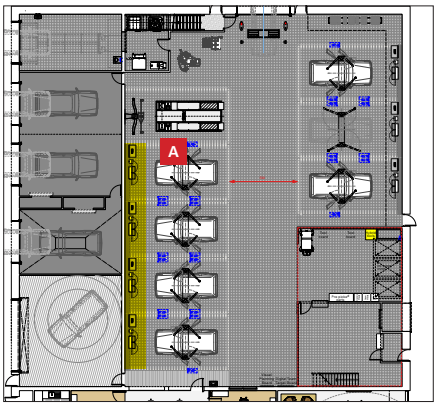

Individual Work Bay Wall

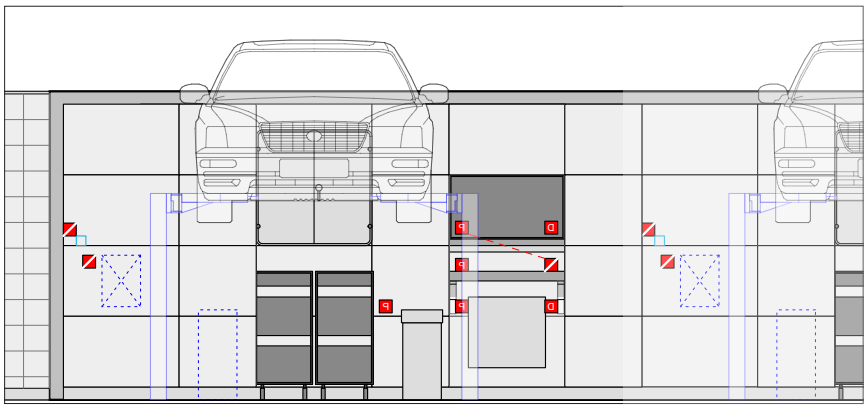

A Indicates a VPS-type Wall

Finishes and Equipment

VPS wall units - supplied as Parts Ordering System - modular units including shelf and tool storage etc
Panels RAL 7004 40 gloss, Dupont 16-40.



NB: Small red rectangles here indicate power / data socket / USB charging requirements.


Featuring plinth for laptop

D Datapoint


Ramp Isolator Switch

P Powerpoint


Work Bay Wall Elevation

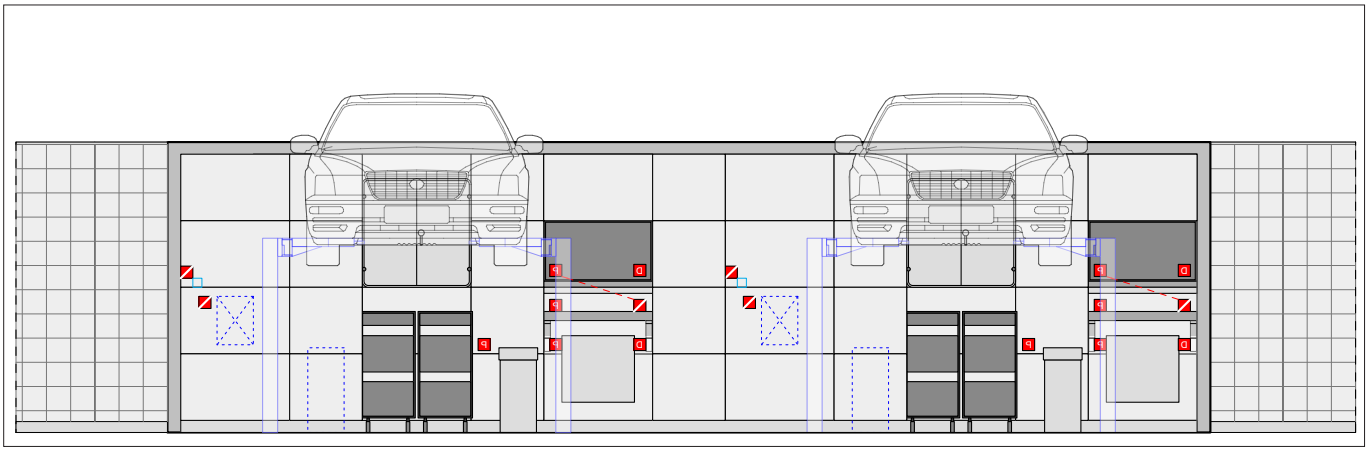

Plan (including power, fuel and airline ceiling accommodation)

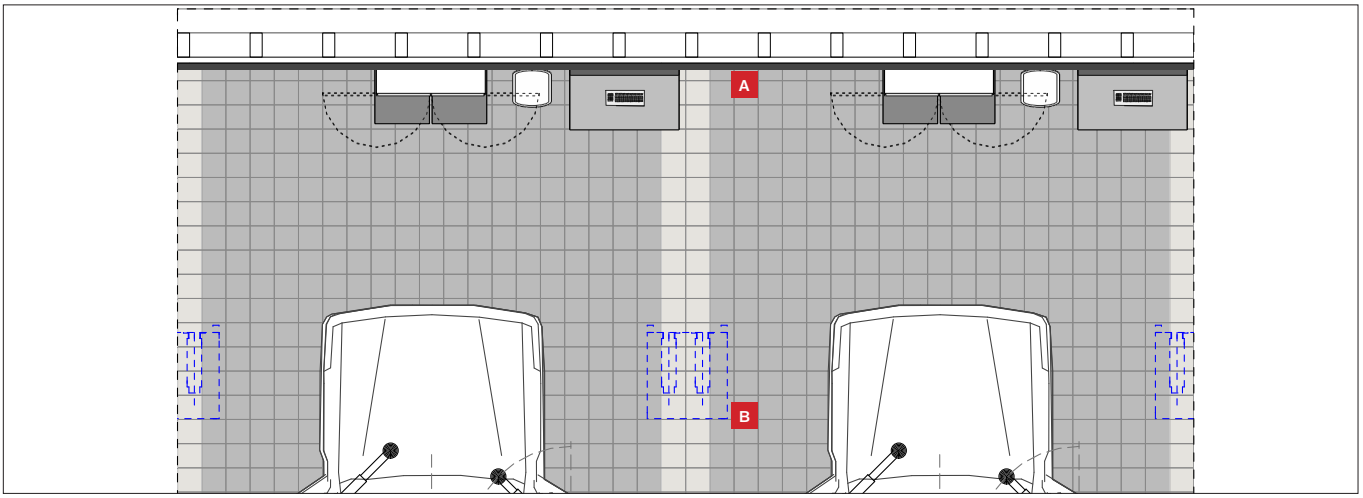

Air, Oil and Water



Key to provision

B Air, Oil and Water type - 2x Air, 1x Oil for each grade, 1x Water between each Bay


5.2.2.1 VPS Bay - B. VPS Standard Bay Details

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

VPS Standard Bay Location

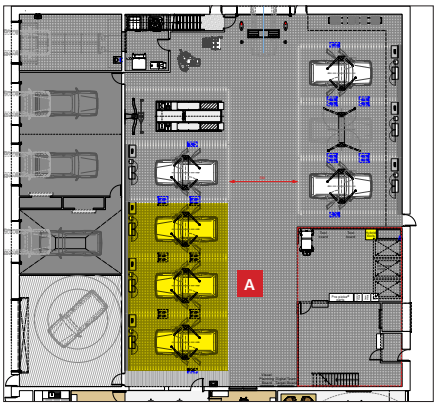


A Indicates a VPS Standard-type Bay


Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.3 - Internal Finishes and Fixtures - A, B1 and B2

Equipment




In-ground Two-piston




Air, Oil and Water
Air, Oil and Water type - 2x Air, 1x Oil for each grade 1x Water between each Bay. Air only - for end Bay (either left- or right-hand orientated).

Standard Bay Dimensions

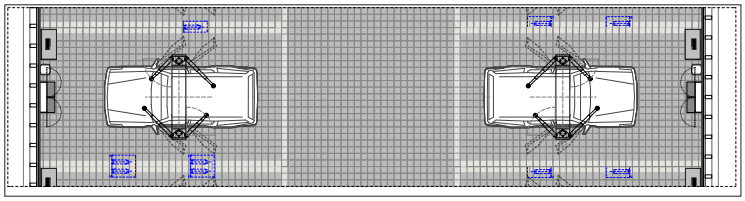


1 Workshop Drive Lane:
6000 mm (minimum 5000 mm)

VPS Standard Bay Detail

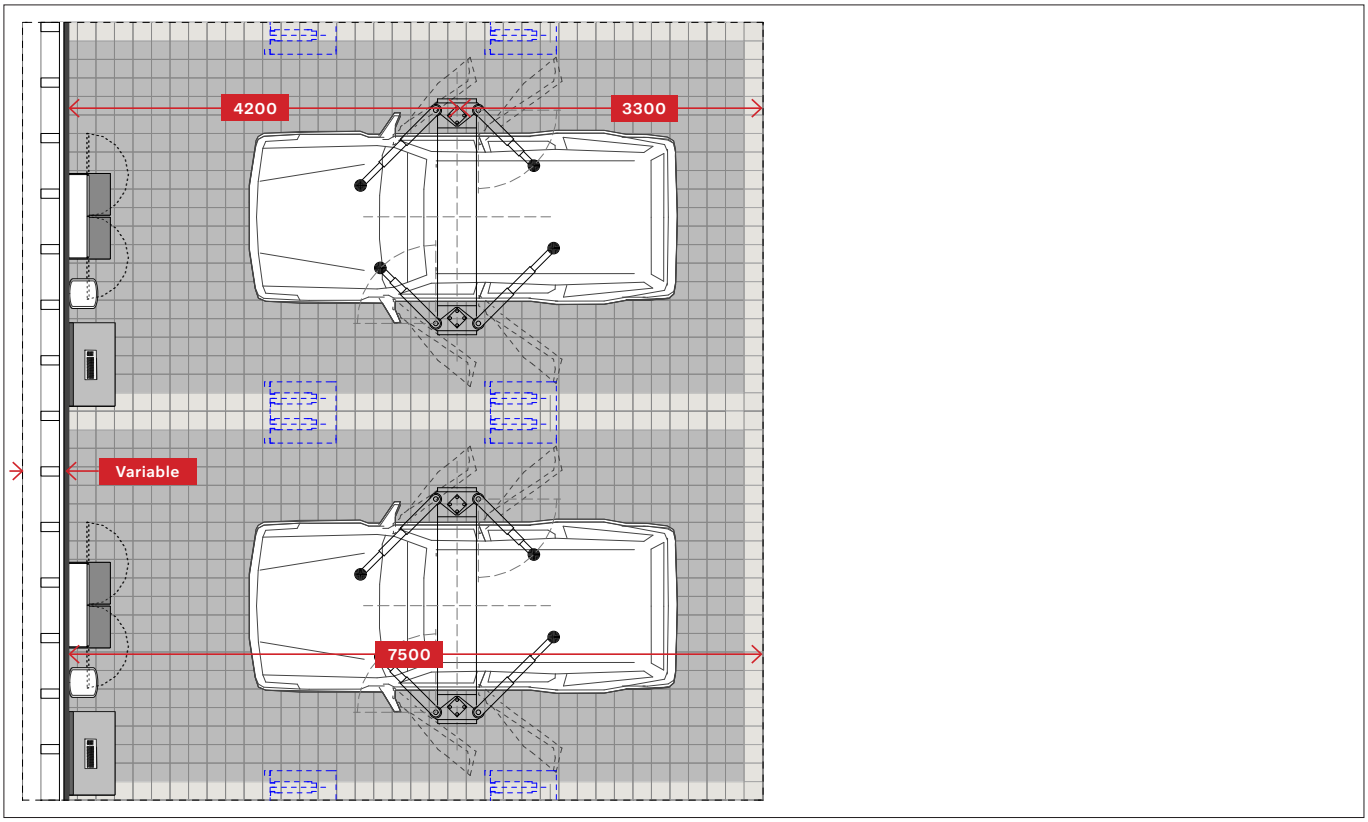

Standard Bay Dimensions

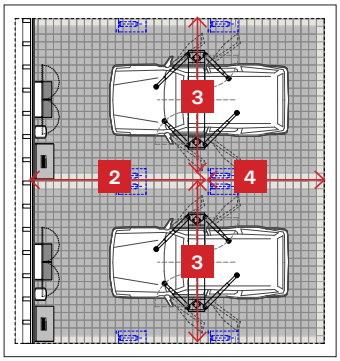

Dimensions for VPS setting-out:

2 Centre lift - Modular Wall:
4200 mm (minimum 4000 mm)

3 Centre lift - Centre lift:
4200 mm mandatory for New Build (minimum 3900 mm)

4 Centre of lift to Drive Lane:
3300 mm (minimum 3000 mm)

NB: Where the bay is adjacent to a side wall, allow a 900mm walkway (minimum 400mm) from the wall to the start of the bay area.
Bay height standard of 4500mm and required lift height of 1900mm

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Equipment

All Equipment should be flush mounted.
Recommended laser or water jet cut for the panels.

1. Ramp controls - Including isolator (isolator cannot be behind open door for H&S)
2. Area for screen if PC tower installed
3. Power sockets for overnight tool charging
4. Acceptable locations for power and data (Recommend inside cabinet or above shelf)

VPS Wall Sockets Mounting



Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**


VOLVO

Meda


Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.3 - Internal Finishes and Fixtures - A, B1 and B2

Equipment




In-ground Two-piston




Air, Oil and Water
Air, Oil and Water type - 2x Air, 1x Oil for each grade 1x Water between each Bay. Air only - for end Bay (either left- or right-hand orientated).

VPS Firestation-type Bay Detail

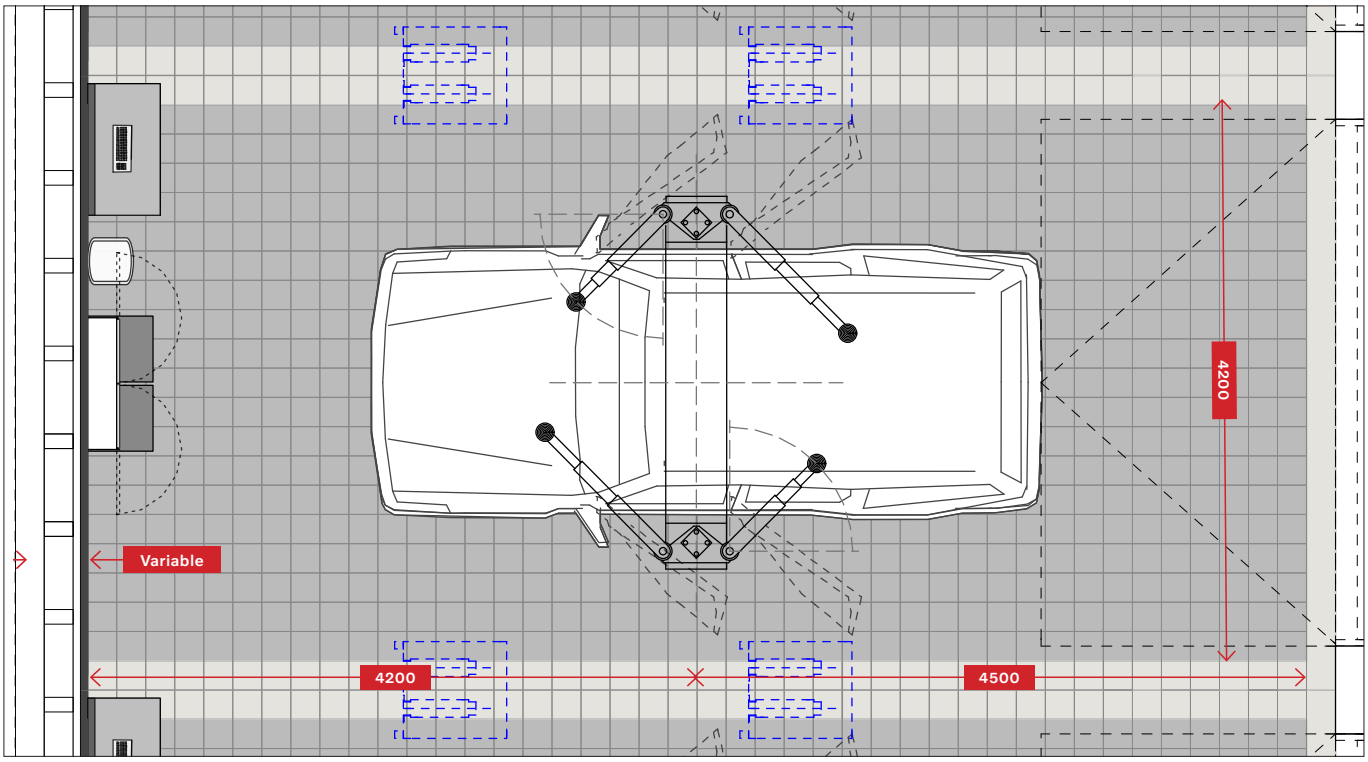

Standard Bay Dimensions

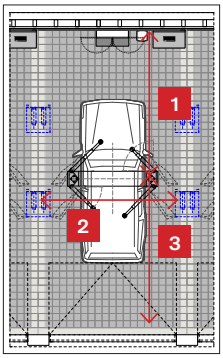

Dimensions for VPS setting-out:

1. Centre lift - Modular Wall:
   4200 mm (minimum 4000 mm)
2. Centre lift - Centre lift:
   4200 mm mandatory for New Build (minimum 3900 mm)
3. Centre of lift to External Wall:
   4500 mm

NB: Where the bay is adjacent to a side wall, allow a 900mm walkway (minimum 400mm) from the wall to the start of the bay area.
Bay height standard of 4500mm and required lift height of 1900mm


5.2.2.1 VPS Bay - E. Details and Finishes

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

VPS Bay Location

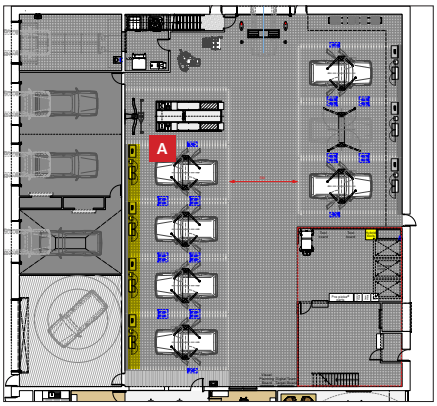

A Indicates a VPS-type Bay

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Finishes / fittings

Finishes

M2 - Workshop walls tiled finish to 2,400mm high - 200 x 200mm dark grey tiles with coved skirtings to match. Ref: Marazzi SistemC 'Citta Grey'

P1 - Plasterboard / drylining to walls above 2,400mm to be matt paint finish to RAL 9003 Signal White.

P3 - Painted joinery in gloss paint to match RAL 7037 Dusty Grey or coved tile to match tiled floor.

FC4 - 200 X 200 X 12mm matt mid-grey non slip tile. Grey grout. Ref: Marazzi SistemT 'Grigio Scuro'.

FC5 - 200 x 200 x 12mm matt light grey non slip bay demarcation tile. Grey grout. Ref: Marazzi SistemT 'Panne'.

CT2 - Suspended Ceiling tiles to Workshop areas.'

'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system. Clipped system throughout. Standard white.


VPS wall units - supplied as Parts Ordering System - modular units including shelf and tool storage etc. Panels RAL 7004 40 gloss, Dupont 16-40.


VS3 - Skirting tiles

Marazzi SistemT 200 x 100mm sit-on skirting tile 'Grigio Scuro'.


NB: Please refer to the Outline Specifications for full details.

VPS Wall notional construction details

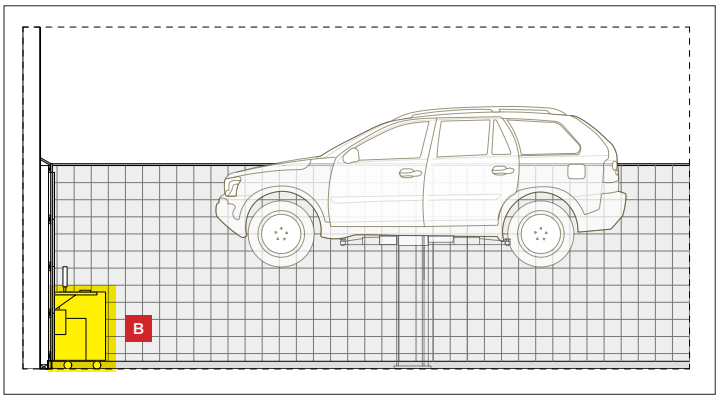



B Detail

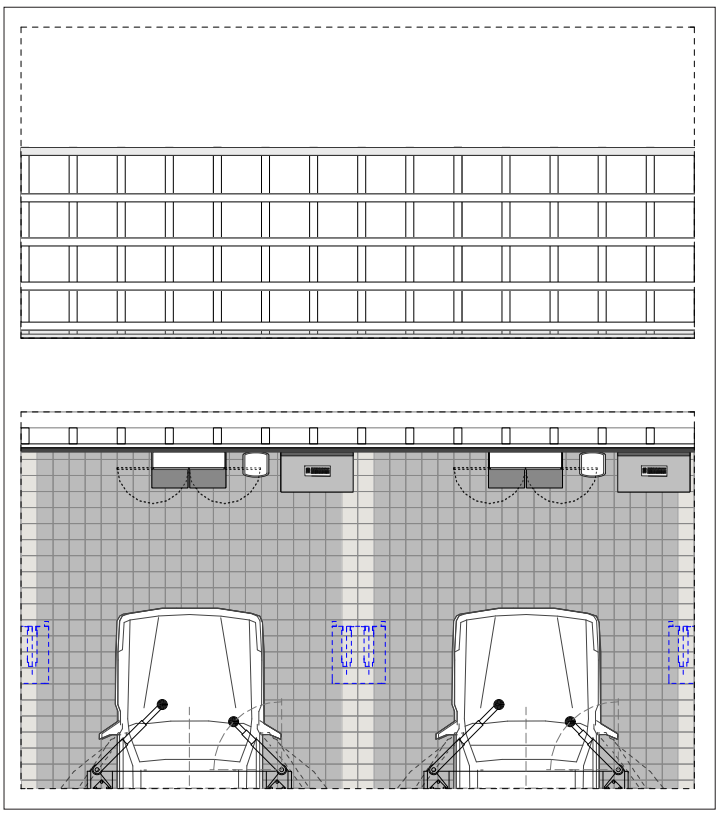

Datasheet 5.2.2 Bays

Do not scale from these drawings


5.2.2.2 Support Bay - Andon Bay

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Support Bay - Andon Bay Location

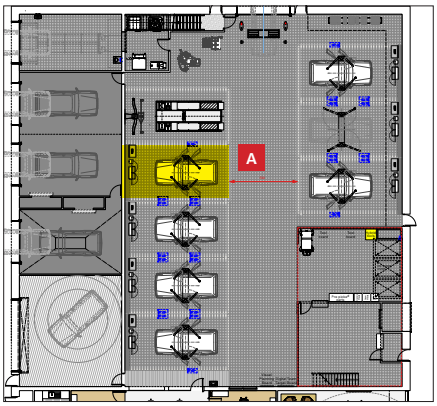

A Indicates a Support-type Bay

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Equipment




2-post Lift example - recommended capacity is 4,000kg




Air, Oil and Water

Air, Oil and Water type - 2x Air, 1x Oil for each grade 1x Water between each Bay. Air only - for end Bay (either left- or right-hand orientated).

Individual Work Bay Plan

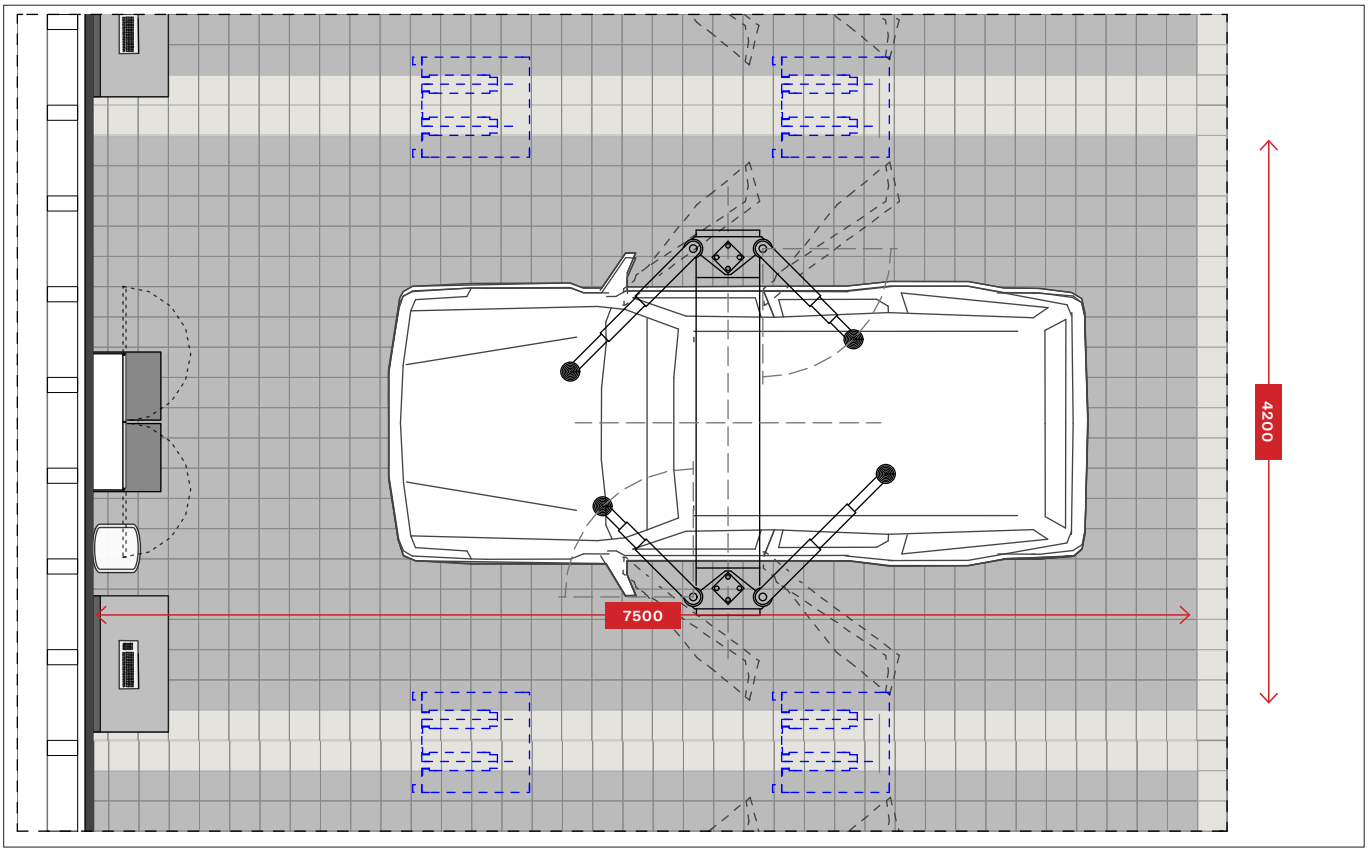

Standard Bay Dimensions



Dimensions for VPS setting-out:

2 Centre lift - Modular Wall:
4200 mm (minimum 4000 mm)

3 Centre lift - Centre lift:
4200 mm mandatory for New Build (minimum 3900 mm)

4 Centre of lift to Drive Lane:
3300 mm (minimum 3000 mm)

NB: Where the bay is adjacent to a side wall, allow a 900mm walkway (minimum 400mm) from the wall to the start of the bay area.
Bay height standard of 4500mm and required lift height of 1900mm

Datasheet 5.2.2 Bays

Do not scale from these drawings


5.2.2.3 Traditional Bay - In-ground Swing Arm Lift

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Traditional Bay - 2-Post Location

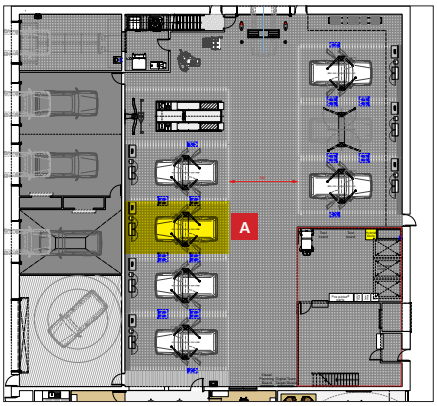

A Indicates a Traditional Bay - 2 Post Lift

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Equipment




2-post Lift example - recommended capacity is 4,000kg




Air, Oil and Water
Air, Oil and Water type - 2x Air, 1x Oil for each grade 1x Water between each Bay. Air only - for end Bay (either left- or right-hand orientated).

Individual Work Bay Plan

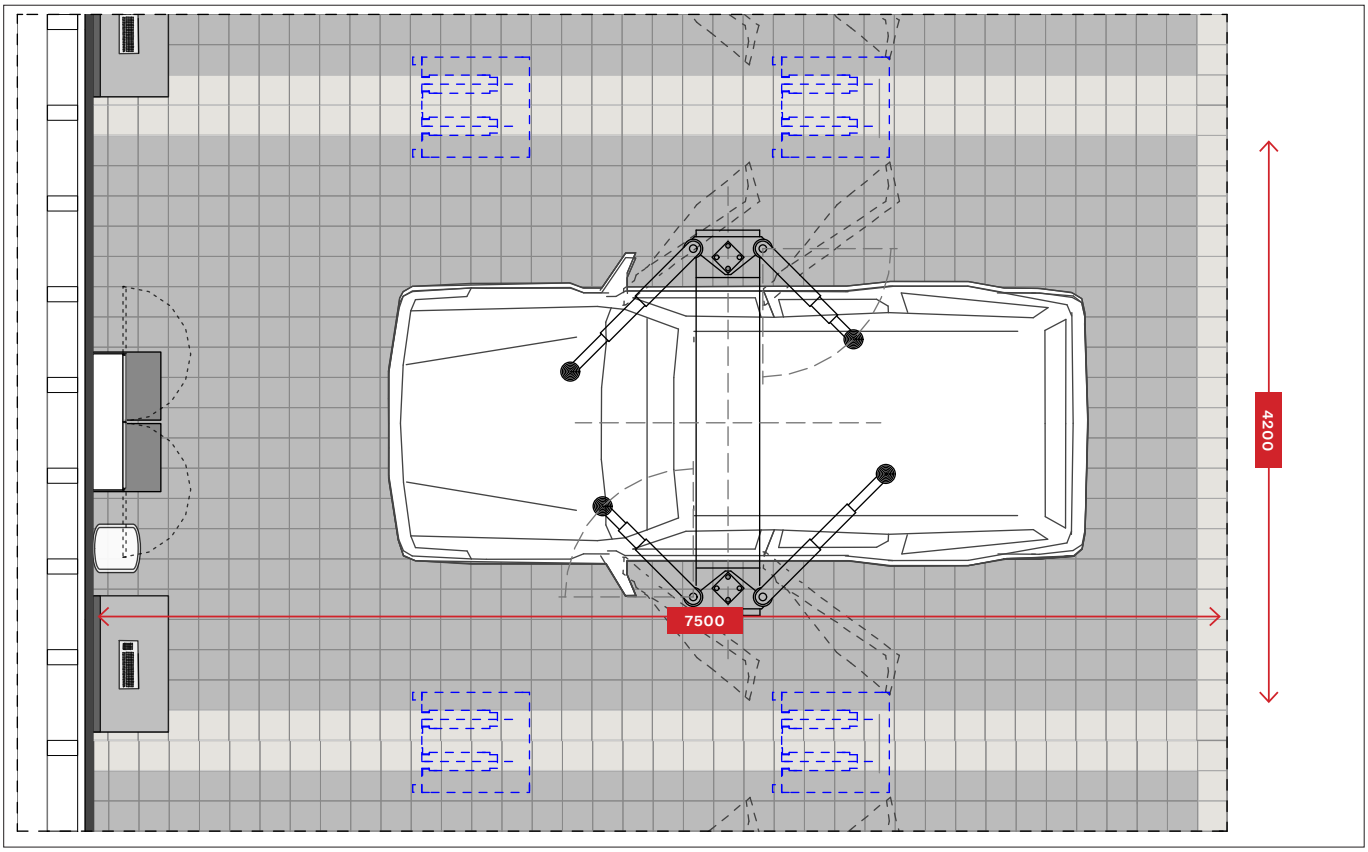

Standard Bay Dimensions



Dimensions for VPS setting-out:

2 Centre lift - Modular Wall:
4200 mm (minimum 4000 mm)

3 Centre lift - Centre lift:
4200 mm mandatory for New Build (minimum 3900 mm)

4 Centre of lift to Drive Lane:
3300 mm (minimum 3000 mm)


NB: Where the bay is adjacent to a side wall, allow a 900mm walkway (minimum 400mm) from the wall to the start of the bay area.
Bay height standard of 4500mm and required lift height of 1900mm

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Laser Wheel Alignment Location

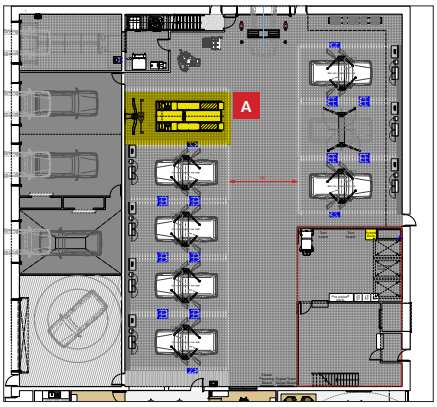






A Indicates a Laser Wheel Alignment Bay


Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Individual Laser Wheel Alignment Bay Plan

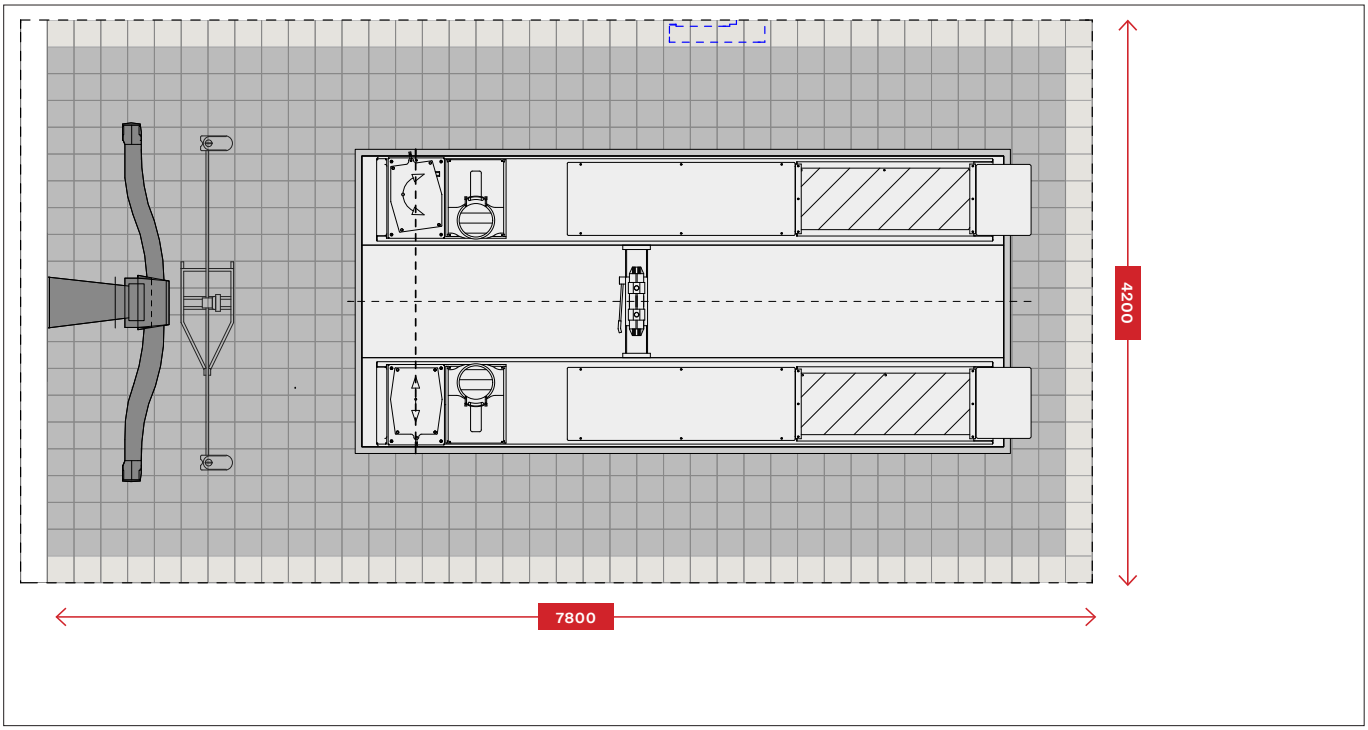

Elevation and Section

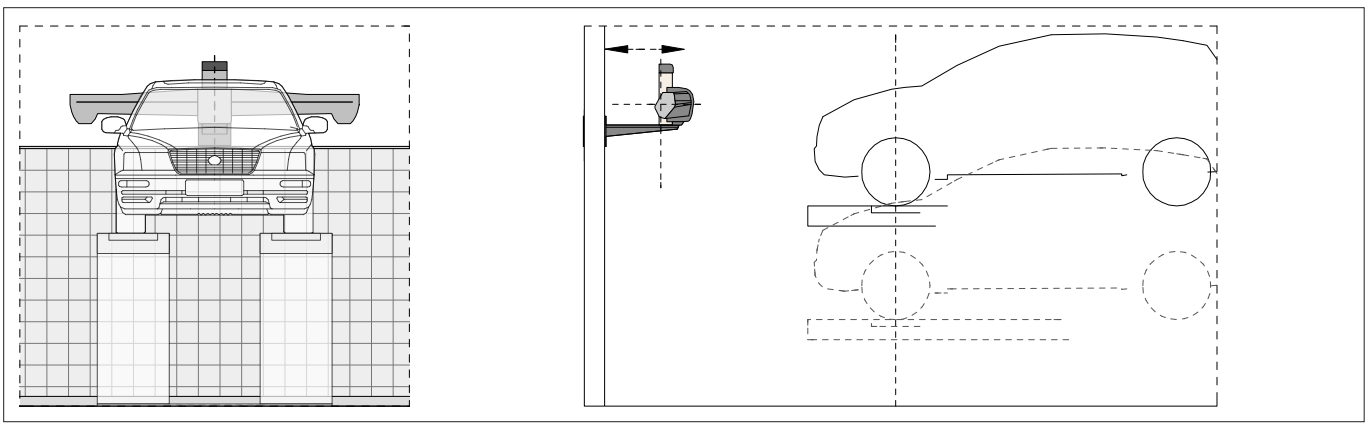

Datasheet 5.2.2 Bays

Do not scale from these drawings


5.2.2.5 E.V. Bay

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

EV / Software Download Bay Location

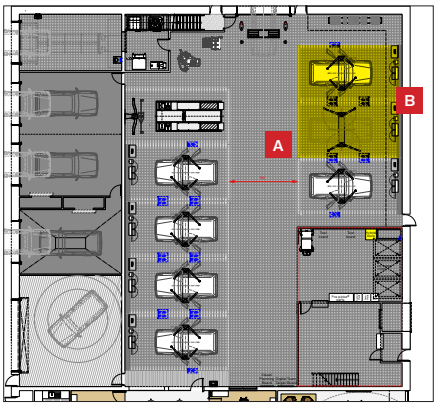

A Indicates an E.V. Bay

B E.V. Charging Point 11kw - positioned between the two bays

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Finishes and Equipment

EV table Lift ('hospital bed'):

Essential lifting equipment for BEV batteries and other specified repairs in VIDA such as power train, subframe, ERAD etc.


Part Number 9997775

Specification:


- Lifting capacity: 1000 kg
- Lifting height: 1800 mm
- Table size: 1200x800 mm
- Hole pattern: 100 x 100 mm, with M10 threads.



EV Linear Bay Plan

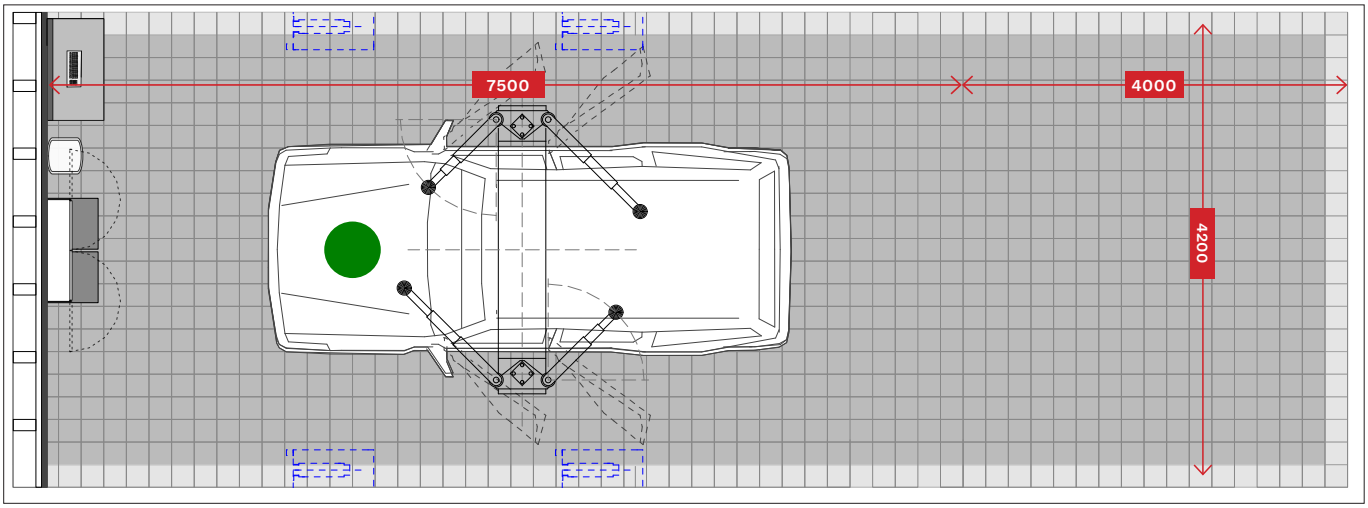

EV Side-by-side Bay Plan

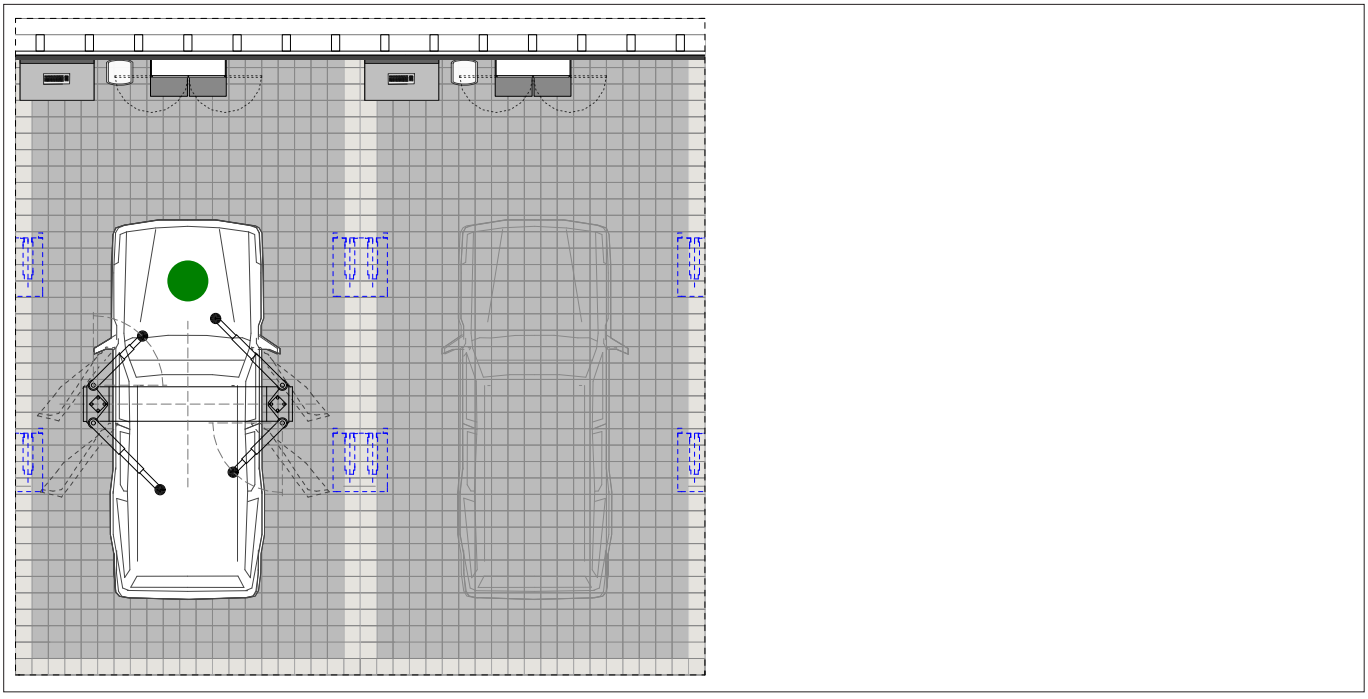

Datasheet 5.2.2 Bays

Do not scale from these drawings


5.2.2.6 Tyre Tread Depth and Alignment Reader

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Tyre Tread Depth Reader Location

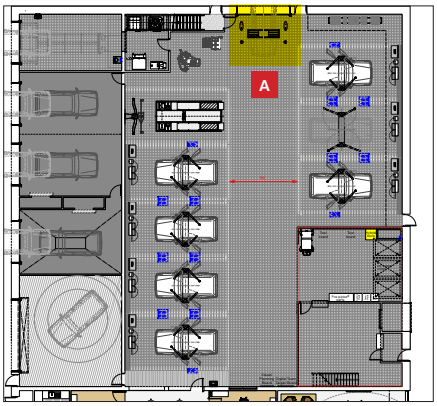

A Indicates a Tyre Tread Depth Reader Bay

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Finishes and Equipment

Four Wheel Alignment Equipment

Completely autonomous drive through equipment immediately identifying alignment, suspension and steering issues:

- Supporting early identification of issues where uneven tyre wear not yet present
- Integrated ANPR (requires subscription for data)
- Requires ideally 4,000mm straight drive through area
- Comprises alignment and tread depth measurements with optional body cameras to lodge vehicle condition status prior to work starting.


Tread and Alignment reader – recessed into slab with control panel rebated in side wall.

Containment for data to link to Service support area.

Typical equipment example



Tyre Tread Depth Reader Bay Plan

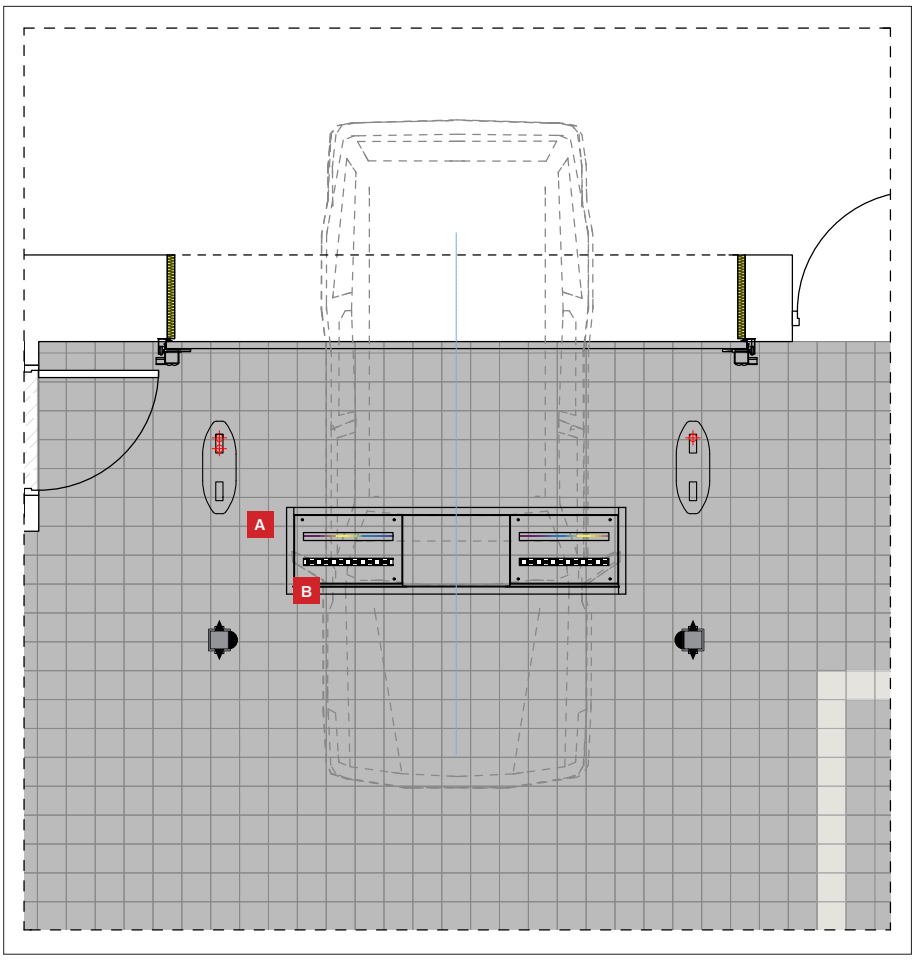

A Alignment unit



B Tread reader floor plate




Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Photography Bay Location

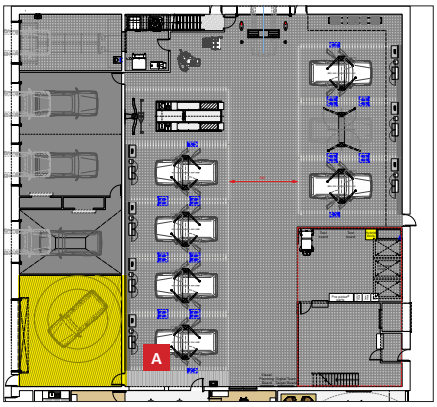

A Indicates an Workshop Photography Bay

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Finishes and Equipment


Operators choice of turntable and photographic equipment installation.

BWIC to form a circular recess in slab to turntable supplier's dimensions.


Curved corner wall to match radius.

Ceiling to be a minimum of 3000mm unobstructed height.


Plan

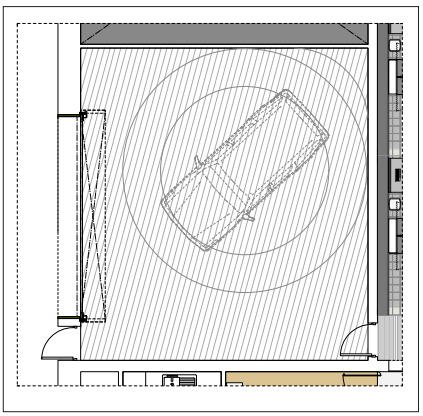

Reflected ceiling plan

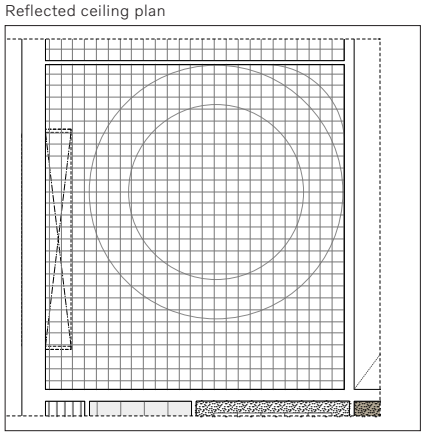

Elevations

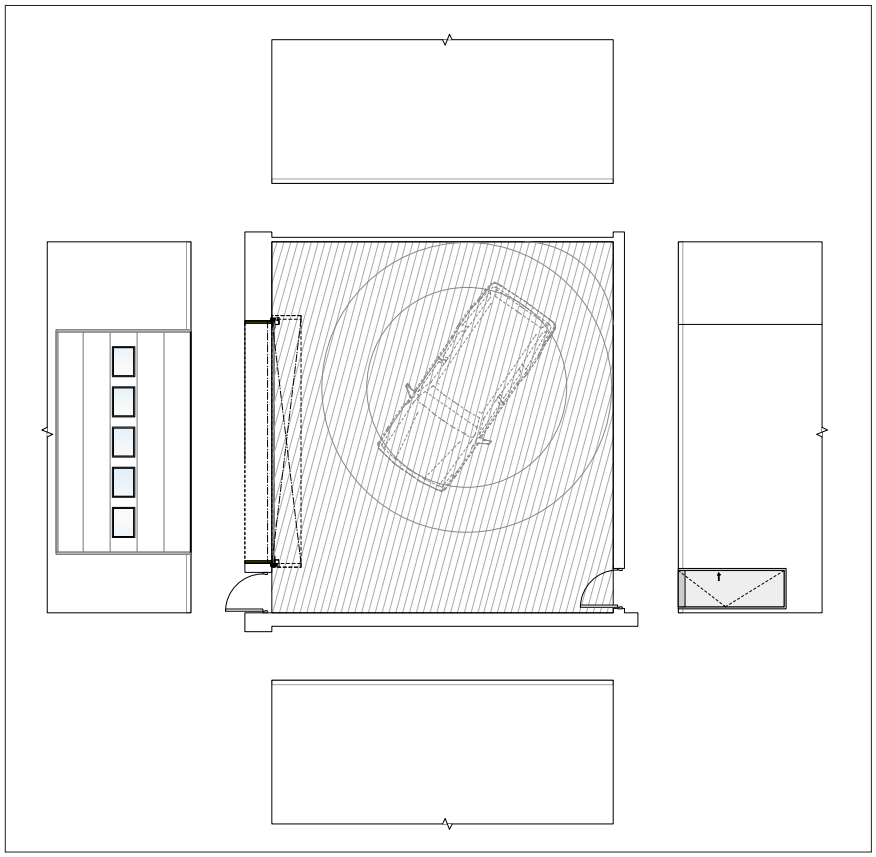

Datasheet 5.2.2 Bays

Do not scale from these drawings


5.2.2.8 Wet Valet Bay and Store

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Wet Valet Bay and Store Location

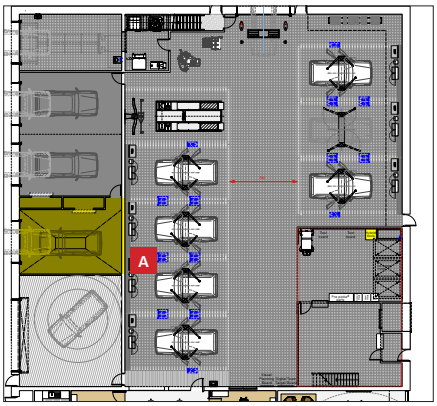

A Indicates Wet Valet Bay and Store

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Finishes / Fittings

Finishes

M2 - Full height tiled finish to 2,400mm high - 200 x 200mm dark grey tiles with coved skirtings to match. Ref: Marazzi SistemC 'Citta Grey'.

P3 - Painted joinery in gloss paint to match RAL 7037 Dusty Grey or coved tile to match tiled floor.

FC4 - 200 X 200 X 12mm matt mid-grey non slip tile. Grey grout. Ref: Marazzi SistemT 'Grigio Scuro'.

Ceiling void or CT2 - Suspended Ceiling tiles to Workshop areas.'

'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system. Clipped system throughout. Standard white.

VS3 - Skirting tiles

Marazzi SistemT 200 x 100mm sit-on skirting tile 'Grigio Scuro'.

NB: Please refer to the Outline Specifications for full details.

Lighting

Wet Valet illuminated employing suitably IP rated sealed 1,500mm fluorescent luminaires overhead.

Emergency lighting within this fitting arrangements as required.

Valeting Equipment

Operator's choice of supplier to valeting areas in accordance with Layout plans.


Wet valet equipment assumed to be mobile 'Karcher' units (gas fired plant and overhead lance not included).

Compressed air feed to valet bay all by specialist.


BWIC - Provide water spur at suitable location with separate break tank to valet spurs.

Allow for ventilation if powered valeting plant installed.


Plan

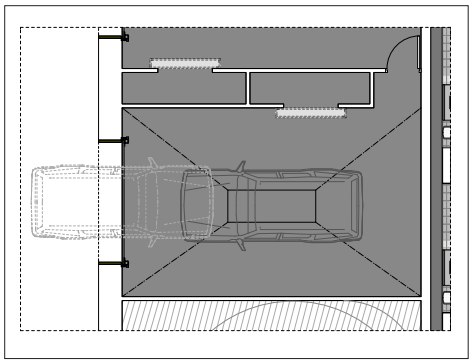

Reflected ceiling plan

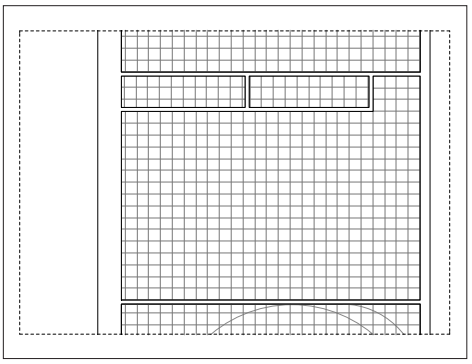

Elevations

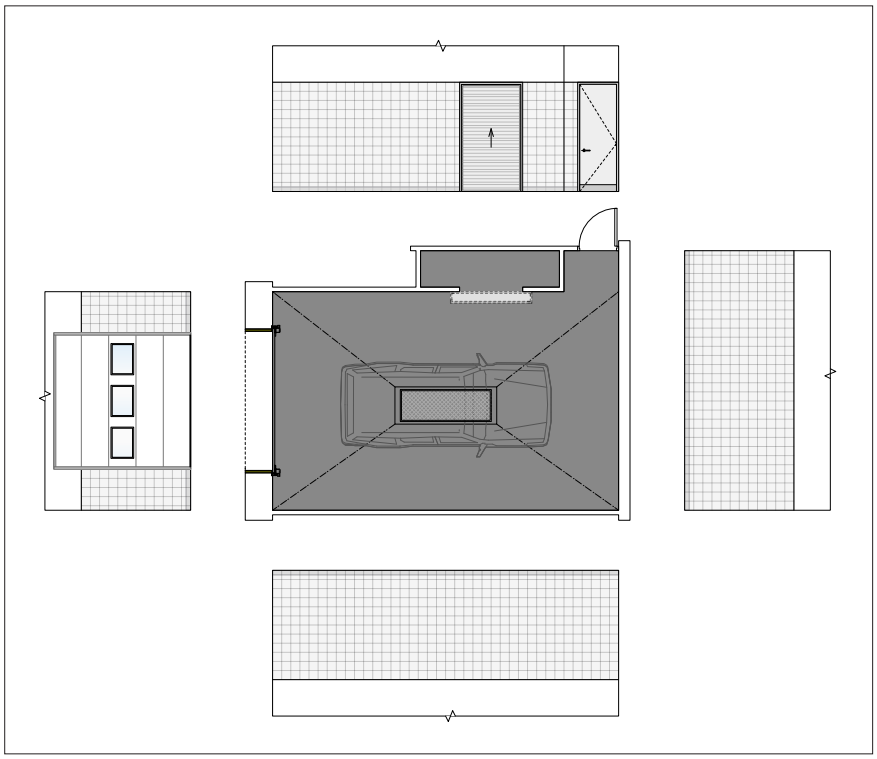

Datasheet 5.2.2 Bays

Do not scale from these drawings


5.2.2.9 Dry Valet Bay and Store

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Dry Valet Bay and Store Location

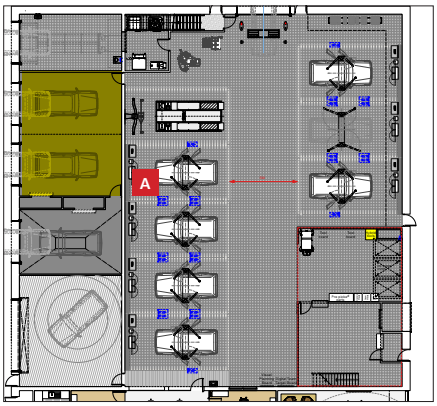

A Indicates Dry Valet Bay and Store

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Finishes / fittings

Finishes

M2 - Full height tiled finish to 2,400mm high - 200 x 200mm dark grey tiles with coved skirtings to match. Ref: Marazzi SistemC 'Citta Grey'.

P3 - Painted joinery in gloss paint to match RAL 7037 Dusty Grey or coved tile to match tiled floor.

FC4 - 200 X 200 X 12mm matt mid-grey non slip tile. Grey grout. Ref: Marazzi SistemT 'Grigio Scuro'.

VS3 - Skirting tiles

Marazzi SistemT 200 x 100mm sit-on skirting tile 'Grigio Scuro'.

Ceiling void or C2 - suspended ceiling tiles to Workshop. areas: 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system. Clipped system throughout. Standard white.

NB: Please refer to the Outline Specifications for full details.

Lighting

Dry Valet shall be illuminated employing suitably IP rated sealed 1,500mm fluorescent luminaires mounted at 1,750mm above finished floor level around the perimeter and mounted on the soffit overhead with switching arranged to allow for either perimeter or central lighting to be employed.

Emergency lighting within this fitting arrangements as required.

Dry valet equipment


Dry valet equipment to include workbenches and storage units.

BWIC - Provide water spur at suitable location with separate break tank to valet spurs.


Allow for ventilation if powered valeting plant installed.

Dry valet to include IP rated batten lighting to side walls at low height.


Plan

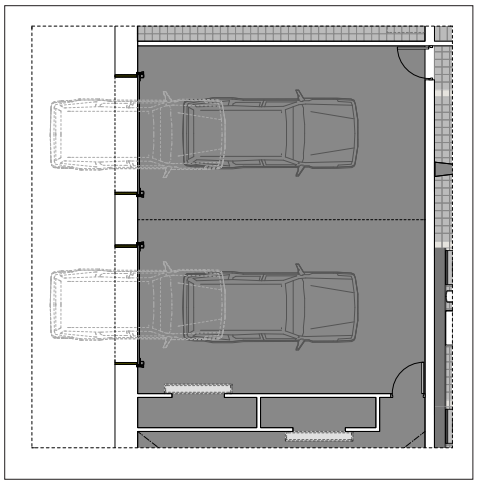

Reflected ceiling plan

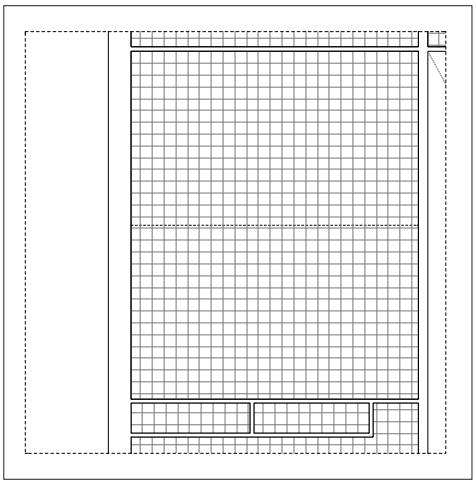

Elevations

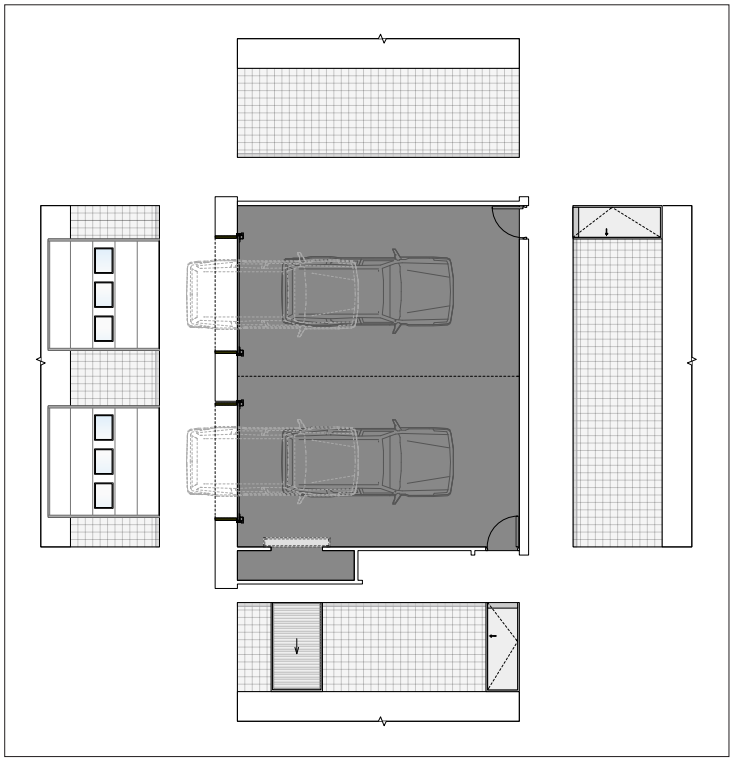

Datasheet 5.2.2 Bays

Do not scale from these drawings


5.2.2.10 Smart Repair and Alloy Wheel Repair Bay

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Smart Repair and Alloy Wheel Repair Bay Location

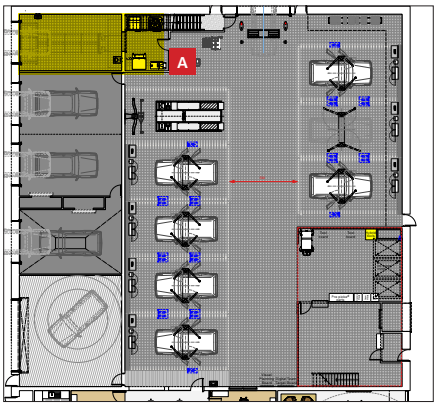

A Indicates Smart Repair

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Finishes and Equipment

Operators' choice of proprietary, freestanding Smart unit on concrete slab with integrated services and extract ventilation.

BWIC; supply and co-ordination of 3-Phase power and data connections.


Floor slab to be level with ramped entrance.

Lighting


Smart Repair shall be illuminated employing suitably IP rated sealed 1,500mm fluorescent luminaires mounted at 1,750mm above finished floor level around the perimeter and mounted on the soffit overhead with switching arranged to allow for either perimeter or central lighting to be employed.

Emergency lighting within this fitting arrangements as required.


Plan

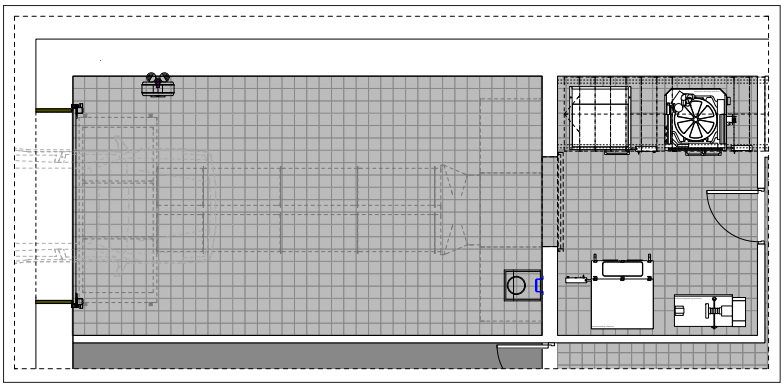


Reflected Ceiling Plan

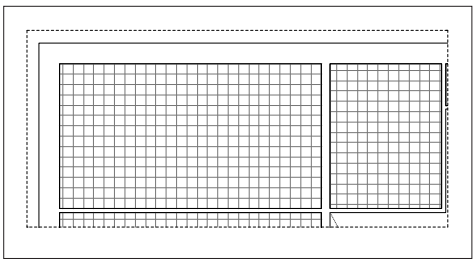

Elevations

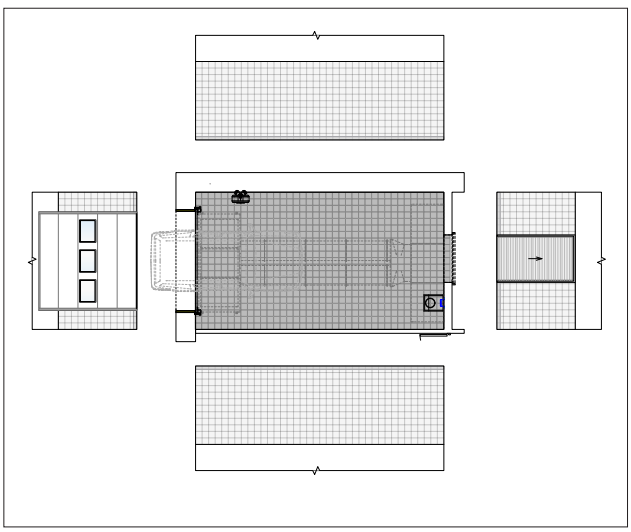

Elevations

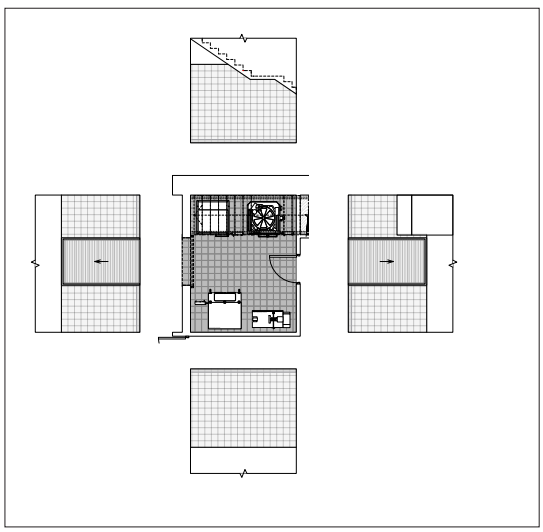

Datasheet 5.2.3 Areas

Do not scale from these drawings


5.2.3.1 Tyre Fitting

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Unit Repair Area Location

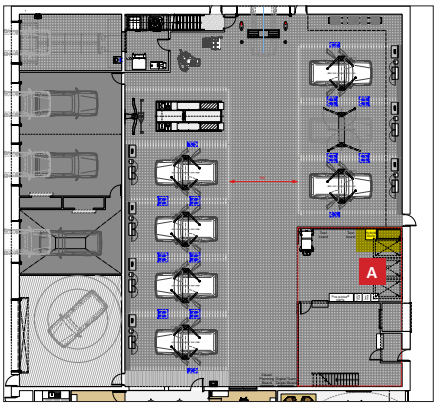


A Indicates a Unit Repair Area

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Tyre Assembly Area Location

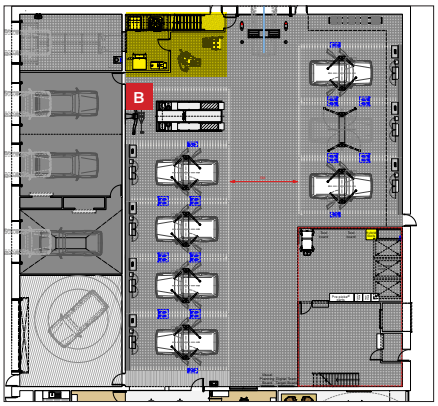

B Indicates a Wheel and Tyre Assembly Area

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Typical Tyre Changer and Balancer



Finishes / fittings

Finishes

M2 - Full height tiled finish to 2,400mm high - 200 x 200mm dark grey tiles with coved skirtings to match. Ref: Marazzi SistemC 'Citta Grey'.

P3 - Painted joinery in gloss paint to match RAL 7037 Dusty Grey or coved tile to match tiled floor.

FC4 - 200 X 200 X 12mm matt mid-grey non slip tile. Grey grout. Ref: Marazzi SistemT 'Grigio Scuro'.

VS3 - Skirting tiles

Marazzi SistemT 200 x 100mm sit-on skirting tile 'Grigio Scuro'.

Ceiling void or C2 - suspended ceiling tiles to Workshop. areas: 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system. Clipped system throughout. Standard white.

NB: Please refer to the Outline Specifications for full details.

Lighting

Workshop lighting shall be LED sealed fluorescent luminaires or similar with average luminance of 750lux at 850mm AFFL– with not less than 1,000lux at car bonnet level.


Temperature to be 4,000 - 4,200K. The lighting shall be switched and controlled from a central switch control position.

Emergency lighting within this fitting arrangements as required.

Tyre fit Equipment

Operator's choice of supplier to workshop areas in accordance with Layout plans. Tyre Fit and Wheel Balance - surface fixed, bolted to concrete floor slab.

Tyre Fitting plan

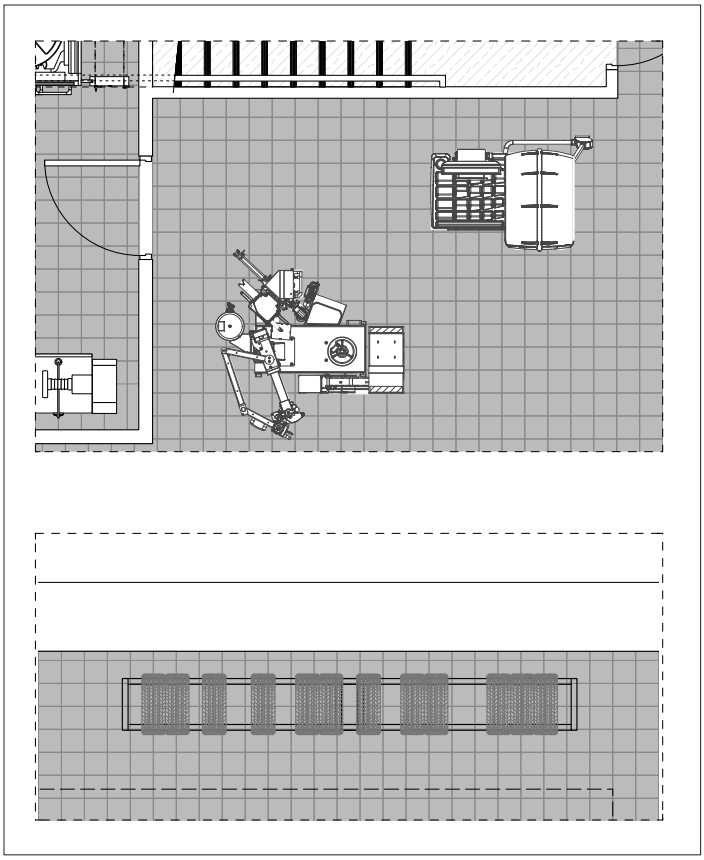

Datasheet 5.2.4 Equipment Store

Do not scale from these drawings


5.2.4.1 Special, Hybrid and General Tools

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Equipment Store Location

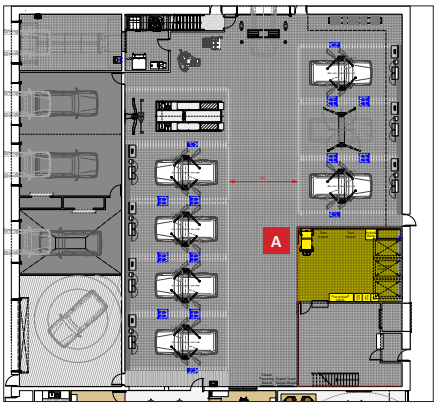

A Indicates the Equipment Store Area

Finishes and Equipment

In accordance with the General Finishes as specified in the Datasheets 5.2.1.6 - Internal Finishes and Fixtures - A, B1 and B2

Finishes and Equipment

Ceiling

Self finish.

or

Emulsion paint to underside of soffit.

Walls

M2 - Tiling to walls (up to 2400mm high FFL) - 200 x 200mm grey wall tile, matt. Ref: Marazzi SistemC 'Citta Grey'.

Paint to walls - White eggshell washable moisture resistant finish to RAL 9003 Signal White, above 2,400mm.

Floor

FC4 - Floor tiles – 200 x 200 x12mm matt dark grey non-slip tile. Ref: Marazzi SistemT 'Grigio Scuro'.

VS3 - Skirting tiles - Marazzi SistemT 200 x 100mm sit-on skirting tile 'Grigio Scuro'.

Lighting

Workshop lighting shall be LED sealed fluorescent luminaires or similar with average luminance of 750lux at 850mm AFFL– with not less than 1,000lux at car bonnet level.


Temperature to be 4,000 - 4,200K. The lighting shall be switched and controlled from a central switch control position.

Emergency lighting within this fitting arrangements as required.

Special Tools




Example small size equipment




Example large size equipment




Plan

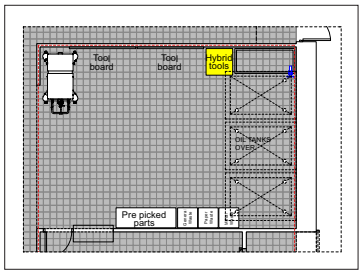

Reflected ceiling plan

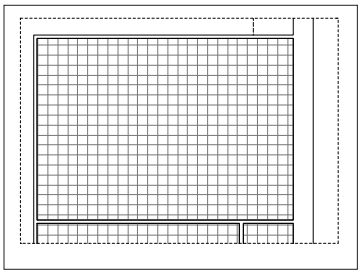

Elevations

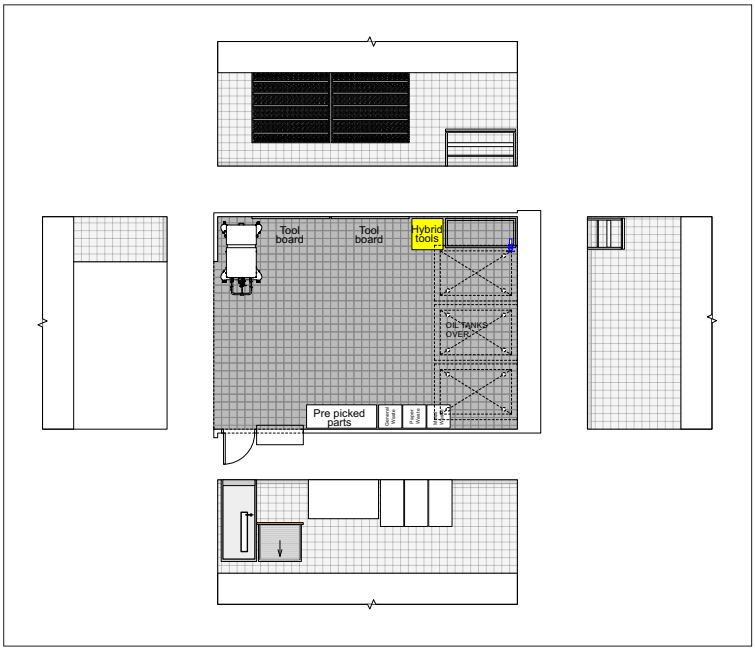

Please note that the **minimum** size for the Equipment Store is **50m²**

An example of what the Tools and Equipment Area may look like.



Datasheet 5.2.5 Rooms

Do not scale from these drawings


5.2.5.1 Service Customer Meeting Point

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Customer Meeting Point Location

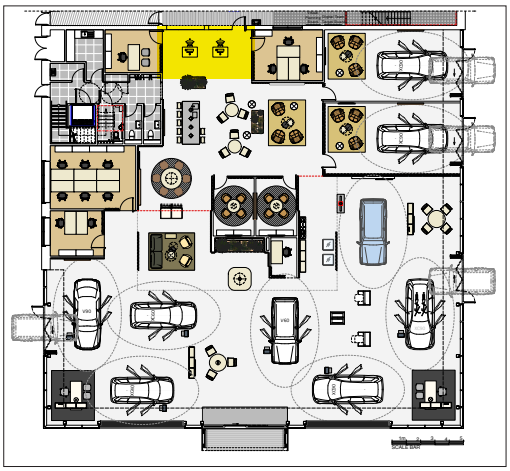

Detailed area

Finishes / fittings

All furniture items, fittings to be supplied by Senab or other VCI approved supplier.

Please ensure adequate provision is made for power and data requirements in this area.

Finishes

FPC1 - Polished concrete floor.

P1 - Plasterboard walls decorated in emulsion paint matt finish RAL 9003 Signal White.

P1A - Alternate paint to walls in The Living Room as indicated - matt paint finish to RAL 7044 Silk Grey.

P2 - Painted joinery decorated in gloss paint semi matt finish RAL 9003 Signal White.

P2A - Painted joinery decorated in semi-gloss paint, finished to RAL 7044 Silk Grey.

VS1 - Skirtings – 56mm timber (or MDF) skirting lacquer or semi gloss painted RAL 9003 Signal White.

VS1A - 56mm Timber (or MDF) skirting lacquer or semi-gloss painted RAL 7044 Silk Grey.

Where this area is located to the u/s of the first floor mezzanine ceiling heights are typically 2,800 - 3,000mm above FFL to the specification outlined below.

CS6 - Proprietary 600 x 1,200mm lay in timber ceiling in real wood 'Ash' ribs at 20mm thick x 45mm deep and 30mm spacing gap. Lay in timber ceiling to be supplied by VCI approved supplier only.

P3 - Living area soffit behind open ceilings - Ceiling (and all services / ducts) decorated in RAL 9005 Jet Black matt finish.

Timber ceilings to be laid linear with timber plank floor below.

Dropped bulkhead with MF small-tolerance margins can be used to achieve a layout to full tile.

GP1 - Screen walls between Showroom and Aftersales ('Viewing window').

Proprietary 'Komfort PolarTec' or 'Polar Vision' frameless, highly transparent extra clear, low iron glass, fixed vertically.

Frameless double-glazed unit for improved sound insulation may also be specified.


Door, full height glazed. Frame colour – rebated PPC white finished to RAL 9003 Signal White.

Typically fire-rated glazing is required between Sales and Aftersales.


All glazing to include manifestation.

NB: Please refer to the Outline Specifications for full details.

Service Customer Meeting Point plan

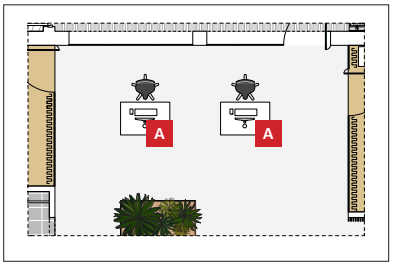

Reflected ceiling plan

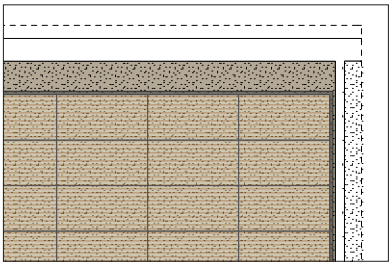


A Floor box location

Elevations



Furniture elevations

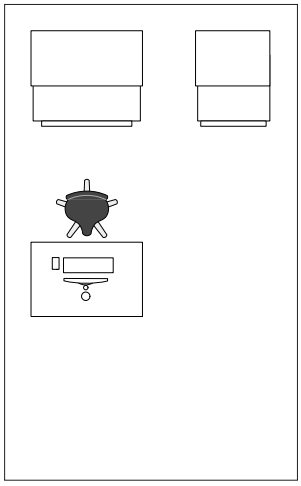

Comprises:
1. Reception desk
2. Task stool.

Datasheet 5.2.5 Rooms

Do not scale from these drawings


5.2.5.2 Service Manager's Office

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Service Managers' Office Location

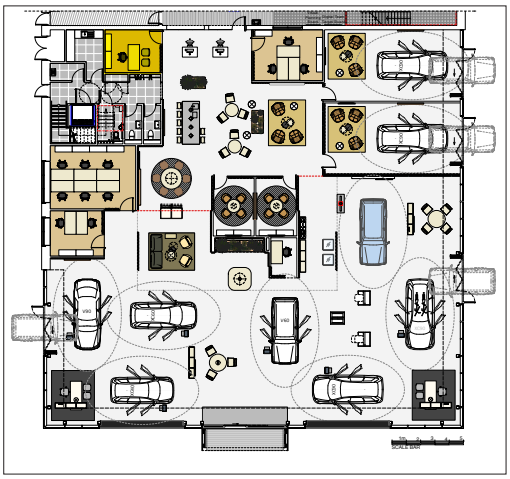

Finishes / fittings

All furniture items, fittings to be supplied by Senab or other VCI approved supplier.

Please ensure adequate provision is made for power and data requirements in this area.

Finishes

FT1 - Tretford Interlife sheet carpet – colour: 572 Milk Chocolate.

CS4 - Offices (no less than 2,400mm high)

600 x 600mm RAL 9003 white tile reveal edge, tegular tile. Ceiling grid in white PPC 15mm tee.

Ceiling margins where shown to achieve full tile ceiling grids symmetrically set out within the room should be finished as (CS1) painted MF gypsum ceiling. Matt finish to RAL 9003 Signal White.

P1B - Paint to walls in Offices.

Plasterboard walls in matt paint finish. to RAL 7047 Telegrey.

All skirtings and joinery in semi-gloss paint finish to match as appropriate.

V1 - Offices

Proprietary 'Komfort Polar' or 'PolarTec' frameless optical white low iron glazed screen and glass door with ironmongery as specified.


All glazing to include manifestation.

All glazed areas to include full length mesh curtains by Senab.


NB: Please refer to the Outline Specifications for full details.

Detailed area

Service Manager's Office plan




Reflected ceiling plan



A Floor box location or wall mounted sockets

B Wall mounted socket

Elevations

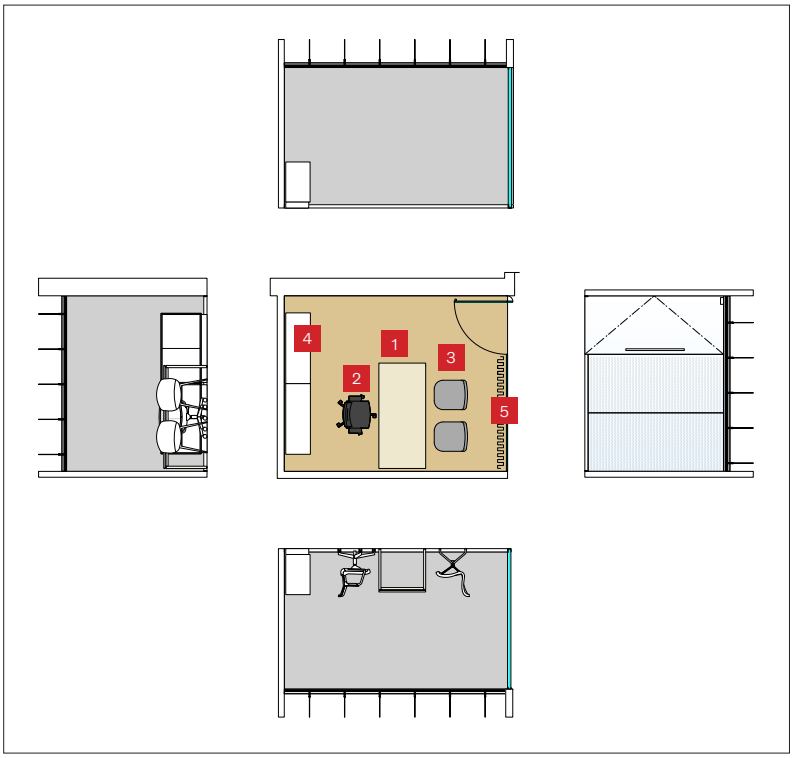

Comprises:
1. Work table
2. Task chair
3. Visitor chairs
4. Storage units
5. Curtain.

Datasheet 5.2.5 Rooms

Do not scale from these drawings


5.2.5.3 Workshop Support Office

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Workshop Office Location

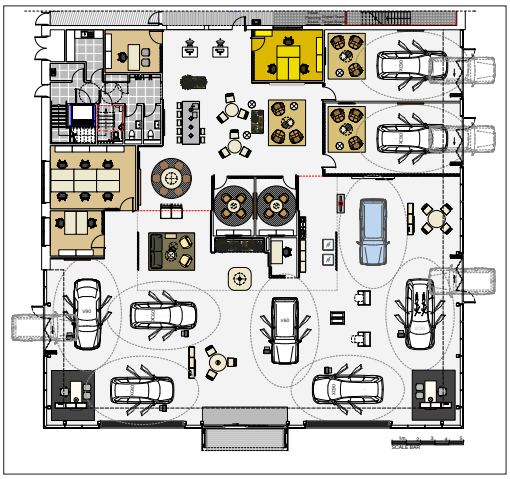

Detailed area

Finishes / fittings

All furniture items, fittings to be supplied by Senab or other VCI approved supplier.

Please ensure adequate provision is made for power and data requirements in this area.

Finishes

FT1 - Tretford Interlife sheet carpet – colour: 572 Milk Chocolate.

CS4 - Offices (no less than 2,400mm high)

600 x 600mm RAL 9003 white tile reveal edge, tegular tile. Ceiling grid in white PPC 15mm tee.

Ceiling margins where shown to achieve full tile ceiling grids symmetrically set out within the room should be finished as (CS1) painted MF gypsum ceiling. Matt finish to RAL 9003 Signal White.

P1B - Paint to walls in Offices.

Plasterboard walls in matt paint finish to RAL 7047 Telegrey.

All skirtings and joinery in semi-gloss paint finish to match as appropriate.

V1 - Offices


Proprietary 'Komfort Polar' or 'PolarTec' frameless optical white low iron glazed screen and glass door with ironmongery as specified.

All glazing to include manifestation.


All glazed areas to include full length mesh curtains by Senab.

NB: Please refer to the Outline Specifications for full details.

Workshop Support Office plan

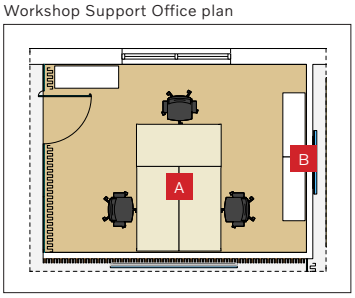


Reflected ceiling plan



A Floor box location or wall mounted sockets

B Wall mounted socket

Elevations

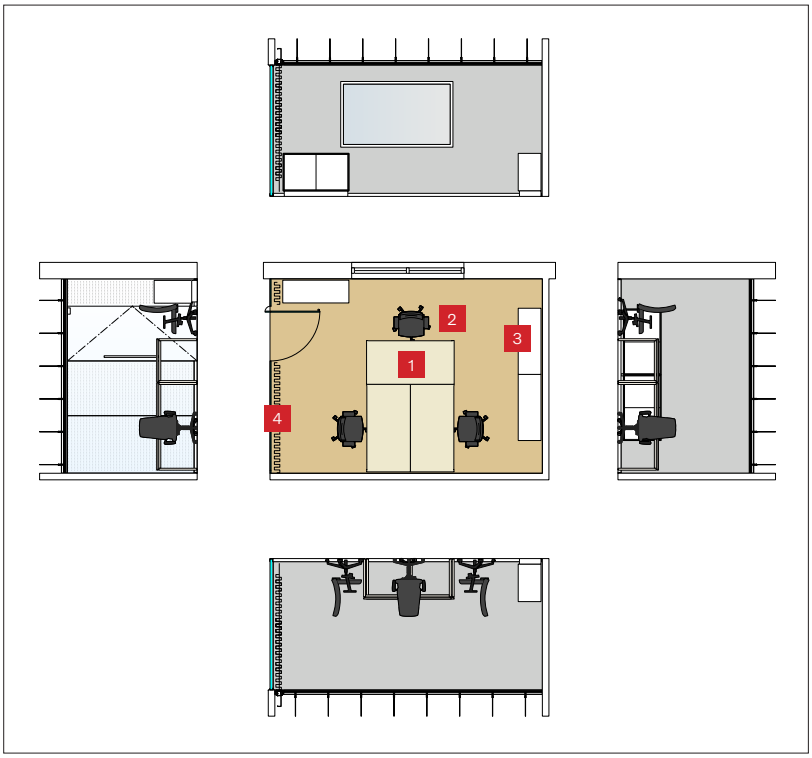


Comprises:
1. Work table
2. Task chair
3. Storage units
4. Curtain.

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Technicians Facilities Location

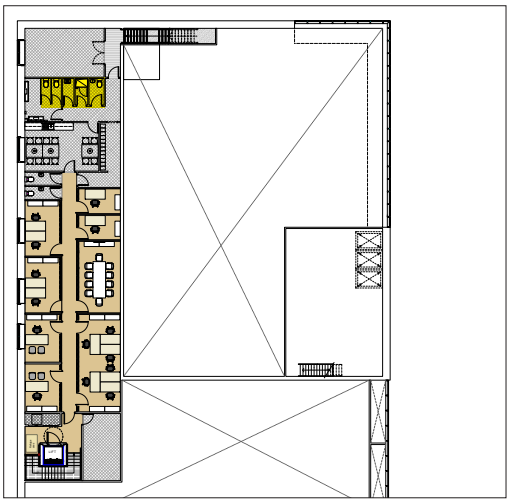

Detailed area

Finishes / fittings

All furniture items and fittings to be supplied by the Retailer and same to advise contractors.

Please ensure adequate provision is made for power requirements to this area.

Please note that all finishes to this area are to the Retailer's own specification - those listed below are for reference only.

Fittings

WC and basin range 'Armitage Shanks' white vitreous China. Urinal - 'Acorn Powell Apinox' - 064 flushing trough 1,600 x 500mm with integral cistern, wall mounted.

Wash trough – 'Armitage Shanks HTM64 (SU H)' firth scrub-up trough 1,600 x 500mm with Marwik in wall mounted thermostatic mixer single elbow lever tap.

Shower units – 'Kohler Mira Zest' electric shower, tray and cubicle folding door.

Mirrors – 600 x 900mm silver backed float glass set in flush with tiled walls.

Wall mounted soap dispensers - satin stainless steel finish.

Hand driers - satin stainless steel finish.

Toilet roll holders, flush plates etc – all in satin stainless-steel to match ironmongery finish consistently including pillar taps.

CT1 - Suspended Ceiling tiles to Staff Toilet areas. 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system.

Ceilings typically 2,400mm above FFL.


M1 - Wall tiling 200 x 200mm white wall tile, matt. White grout.

FC3 - Techs Toilets - 450 x 450mm mid grey non-slip tile with grey grout or FV1 - vinyl sheet.


Internal doors - timber solid core, laminated door in frame with concealed hinges and ironmongery as required. Doors to be HW lipped edge finished to RAL 9003 Signal White.

NB: Please refer to the Outline Specifications for full details.

Technicians Facilities plan

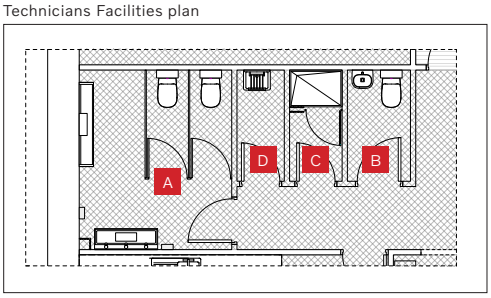


Reflected ceiling plan

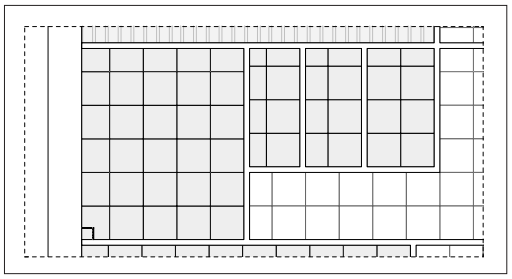

- A Male technicians facilities
- B Female technicians facilities
- C Unisex shower
- D Cleaners Store

Elevations

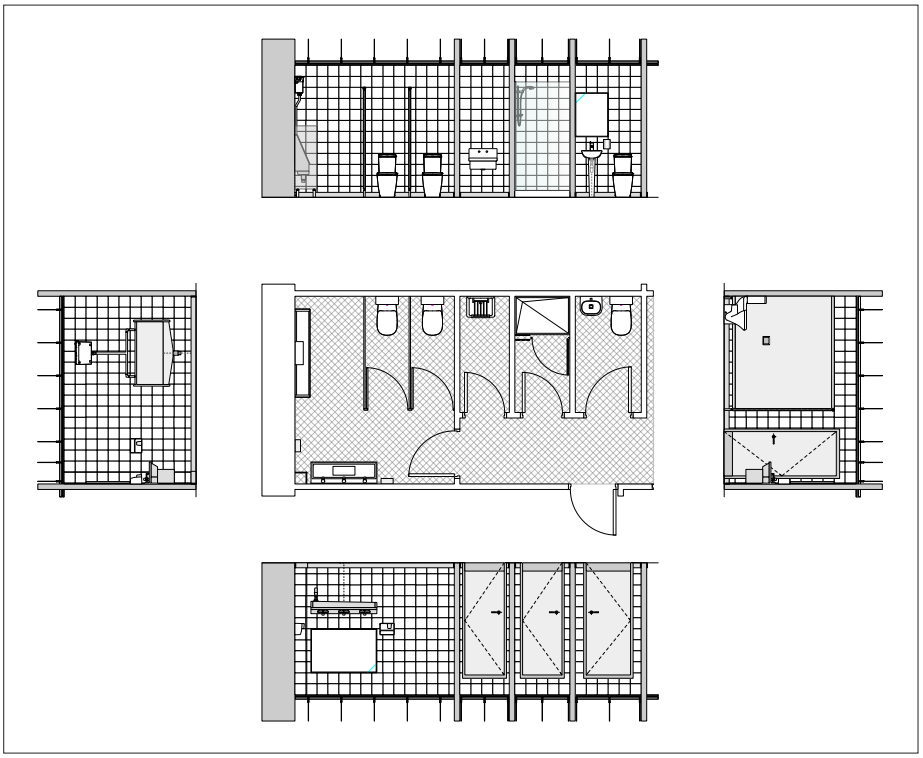

Datasheet 5.2.5 Rooms

Do not scale from these drawings


5.2.5.5 Locker Room / Areas

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Locker Room Location

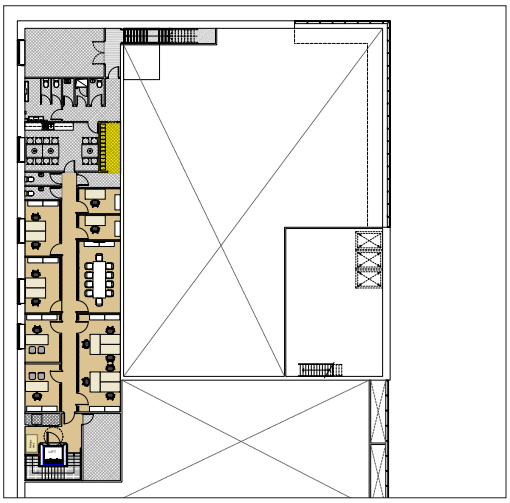

Detailed area

Finishes / fittings

All furniture items and fittings to be supplied by the Retailer and same to advise contractors.

Please ensure adequate provision is made for power requirements to this area.

Please note that all finishes to this area are to the Retailer's own specification - those listed below are for reference only.

Fittings

Retailers choice of supplier of floor mounted lockable lockers.

P1 - Paint to walls generally unless specified otherwise and in back of house areas.

Plasterboard walls and exposed steels decorated in emulsion paint matt finish. RAL 9003 Signal White.


CT1 - Suspended Ceiling tiles to Staff Locker areas. 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system.

Ceilings typically 2,400mm above FFL.


Internal doors - timber solid core, laminated door in frame with concealed hinges and ironmongery as required. Doors to be HW lipped edge finished to RAL 9003 Signal White.

NB: Please refer to the Outline Specifications for full details.


Locker Room plan



Reflected ceiling plan



Elevations

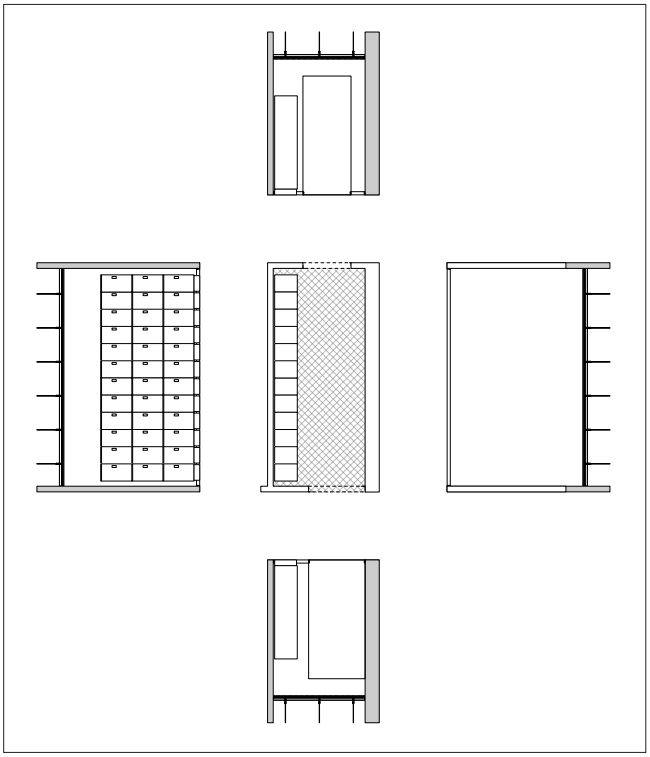

Datasheet 5.2.5 Rooms

Do not scale from these drawings


5.2.5.6 Parts Store

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Parts Store Location

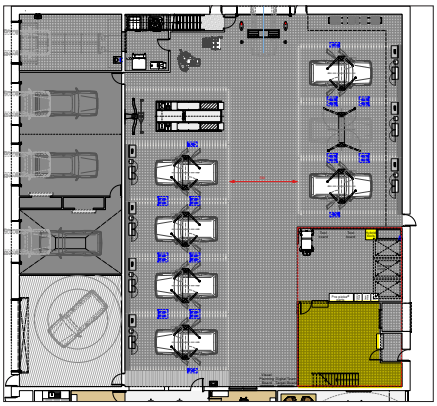

Detailed area

Finishes / fittings

Finishes

FC4 - 200 X 200 X 12mm matt mid-grey non slip tile. Ref: Marazzi SistemT 'Grigio Scuro'.

CT2 - Suspended Ceiling tiles to Parts Store areas. 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system. Clipped system throughout. Standard white.

P1 - Plasterboard / drylining / fairface blockwork to walls to be matt paint finish to RAL 7037 Dusty Grey or tiled finish to 2,400mm FFL as per Workshop specification.

P3 - Painted joinery in gloss paint to match RAL 7037 Dusty Grey or coved tile to match tiled floor.


Doors to be timber solid core, laminated door and frame with concealed hinges and ironmongery as required. Door with exposed HW lip and laminate semi-matt finsih to match RAL 7037 Dusty Grey.

Parts Racking


Operators choice of supplier to Parts Areas.

NB: Please refer to the Outline Specifications for full details.


Parts Store plan

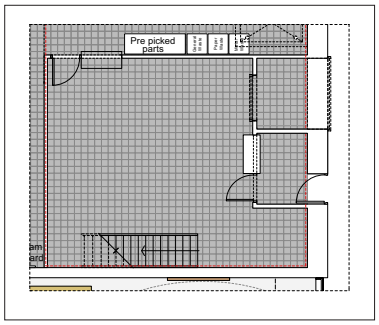

Reflected ceiling plan

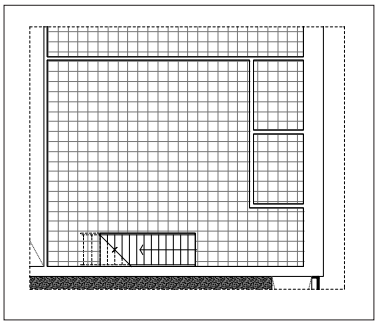

Elevations

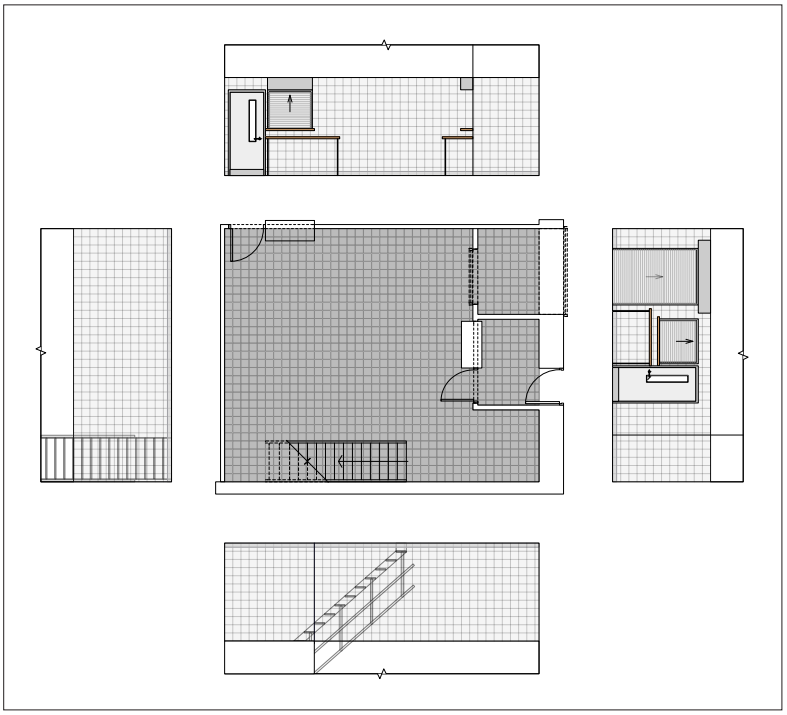

Datasheet 5.2.5 Rooms

Do not scale from these drawings


5.2.5.7 Parts Issuance, Trade Parts, Overnight Delivery, Waste

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Parts support areas Location

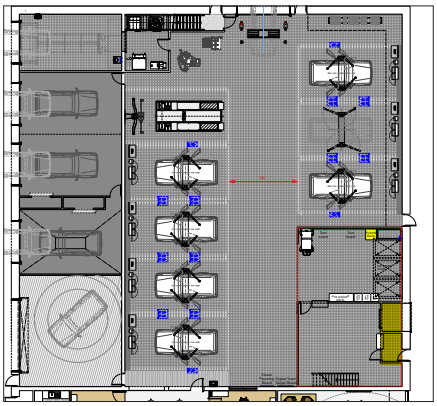

Detailed area

Finishes / fittings

Finishes

FC4 - 200 X 200 X 12mm matt mid-grey non slip tile. Grey grout. TBC.

CT2 - Suspended Ceiling tiles to Parts Store areas. 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system. Clipped system throughout. Standard white.

P1 - Plasterboard / drylining / fairface blockwork to walls to be matt paint finish to RAL 7037 Dusty Grey or tiled finish to 2,400mm FFL as per Workshop specification.

P3 - Painted joinery in gloss paint to match RAL 7037 Dusty Grey or coved tile to match tiled floor.

Doors to be timber solid core, laminated door and frame with concealed hinges and ironmongery as required. Door with exposed HW lip and laminate semi-matt finsih to match RAL 7037 Dusty Grey.

Parts Racking

Operators choice of supplier to Parts Areas.

Dispatch doors and Shutters - Parts drop and dispatch to be proprietary metal secure shutters, manually operated and fire linked where required. Ironmongery for secure locking and to facilitate out of hours' access.


External colour to shutter, trimming steel and frame decorated RAL 9006 White Aluminium.

Dispatch counter


Serving counter with chequer plate layer and lockable metal shutter (fire linked as required).

NB: Please refer to the Outline Specifications for full details.


Parts support areas plan

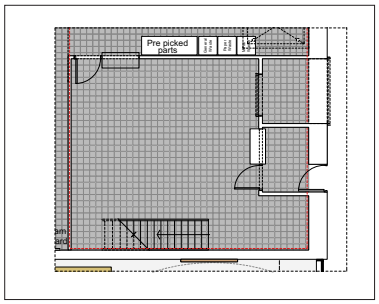

Reflected ceiling plan

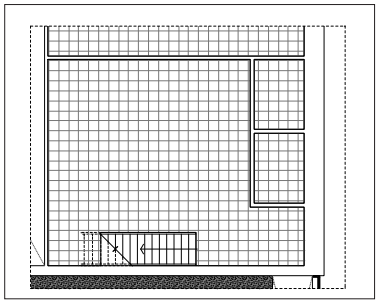

Elevations

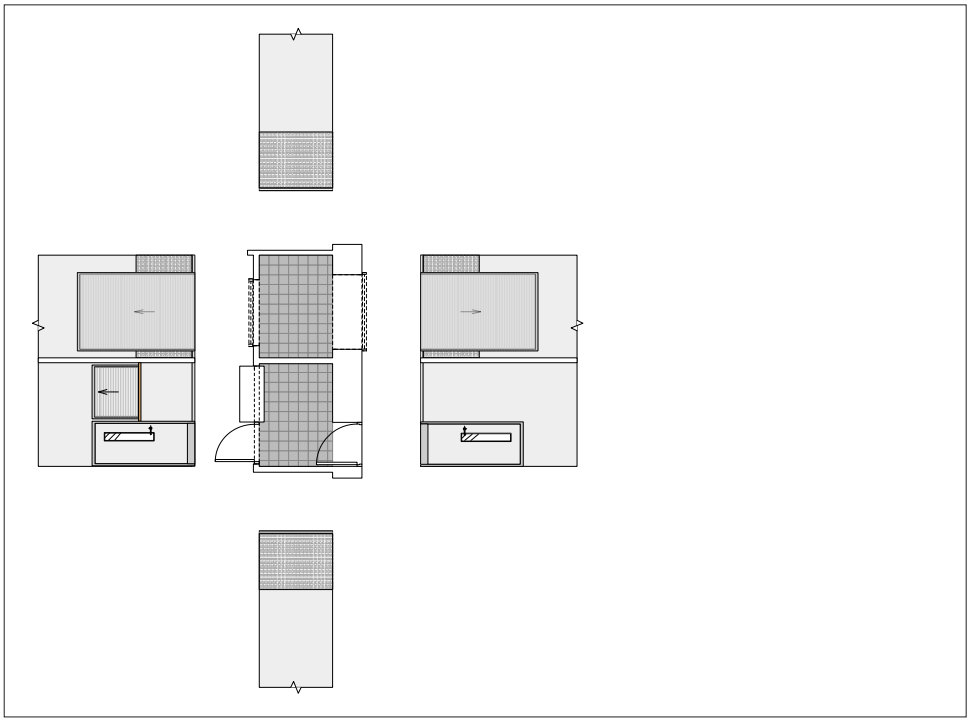

Equipment

Typical indoor waste bins



Typical pre-pick parts racking



Datasheet 5.2.5 Rooms

Do not scale from these drawings


5.2.5.8 Back of House Staircase

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Back of House Staircase Location

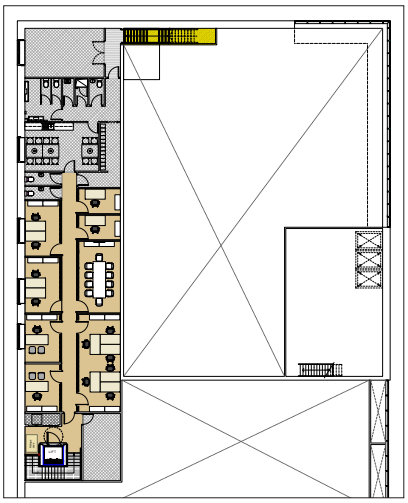

Detailed area

Finishes and Equipment

Finishes

Staircase to be precast, reinforced concrete or galvanised structural steel stairs.

Closed risers, treads in heavy duty carpet (FD3) Anthracite. Frame and stringers painted finish to RAL 7037 Dusty Grey.

Proprietary steel balustrading with painted steel posts and handrails to RAL 7037 Dusty Grey.

CT1 - Suspended Ceiling tiles to Back of house Staircase areas. 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system. Standard white.

M2 - Workshop walls tiled finish to 2,400mm high - 200 x 200mm dark grey tiles with coved skirtings to match. Ref: Marazzi SistemC 'Citta Grey'.


P1 - Plasterboard / drylining to walls above 2,400mm to be matt paint finish to RAL 9003 Signal White.

P3 - Painted joinery in gloss paint to match RAL 7037 Dusty Grey.


Doors to be timber solid core, laminated door and frame with concealed hinges and ironmongery as required. Door with exposed HW lip and laminate semi-matt finish to match RAL 7037 Dusty Grey.

NB: Please refer to the Outline Specifications for full details.


Ground floor plan

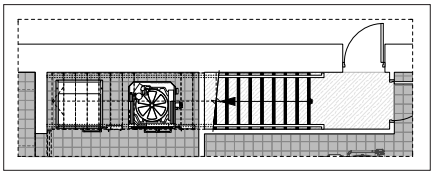


Reflected ceiling plan

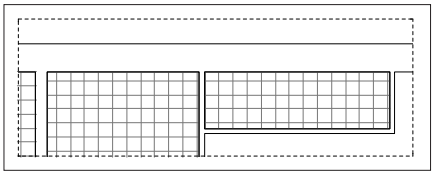

First floor plan

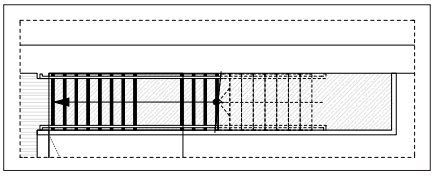

Elevations

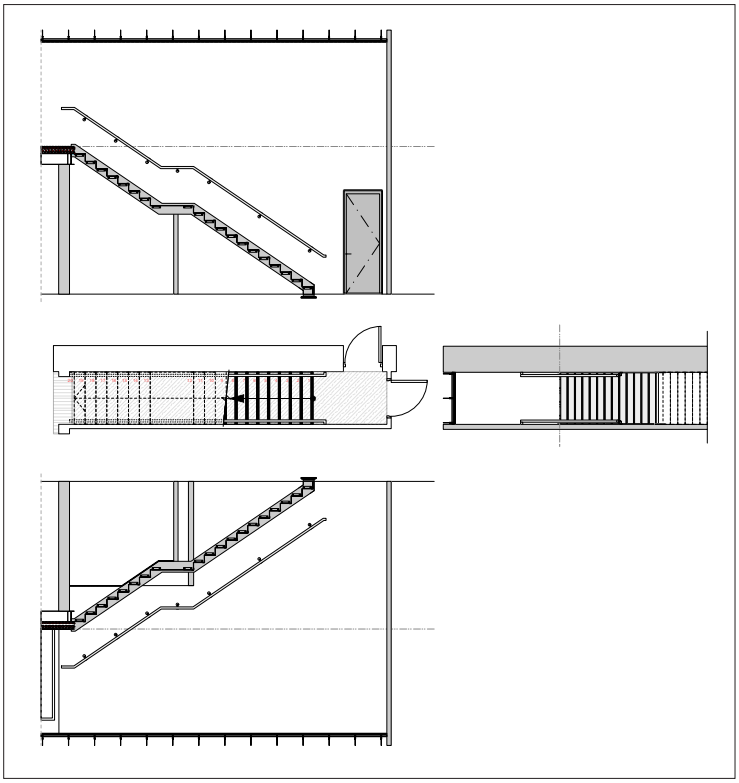

Datasheet 5.2.5 Rooms

Do not scale from these drawings


5.2.5.9 Plant Room

Issued by Volvo Car Ireland.
For additional copies of this Datasheet, a copy of the Outline Specifications or to report any discrepancy, please email **james@experiencemeda.com**

VOLVO

Meda

Location Drawing extract from Generic Layout Plan

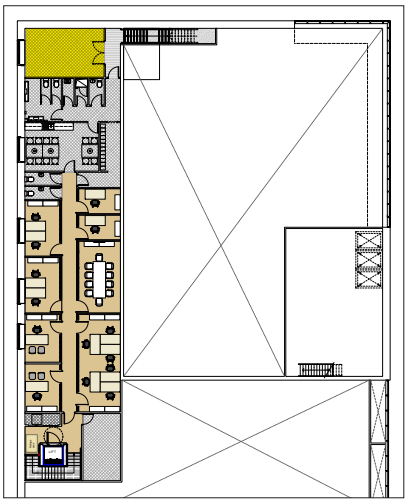

Fittings / fixtures

All furniture items and fittings to be supplied by the Retailer and same to advise contractors.

Please ensure adequate provision is made for power and data requirements in this area.

Please note that all finishes required to this area are to the Retailer's own specification - those listed below are for reference only.

Finishes

CT1 - Suspended Ceiling tiles to Plant Room. 'Zentia Hydrabloc' or similar 600 x 600mm moisture resistant lay in grid system. Standard white.

Ceilings typically 2,400mm above FFL.

P1 - Paint to walls.

Plasterboard walls in matt paint finish RAL 9003 Signal White.


Detailed area

FVI - Floor to be non-slip vinyl sheet with coved skirtings to match. Colour: mid grey


Internal doors - timber solid core, laminated door in frame with concealed hinges and ironmongery as required. Doors to be HW lipped edge finished to RAL 9003 Signal White.

NB: Please refer to the Outline Specifications for full details.


Plan

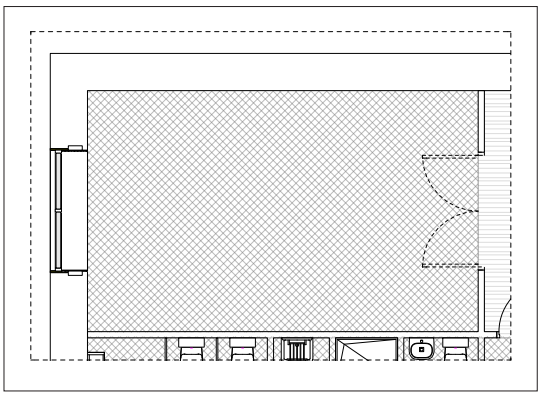

Reflected ceiling plan

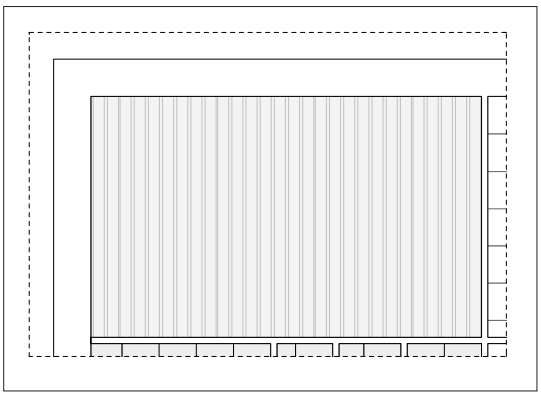

Plan and elevations

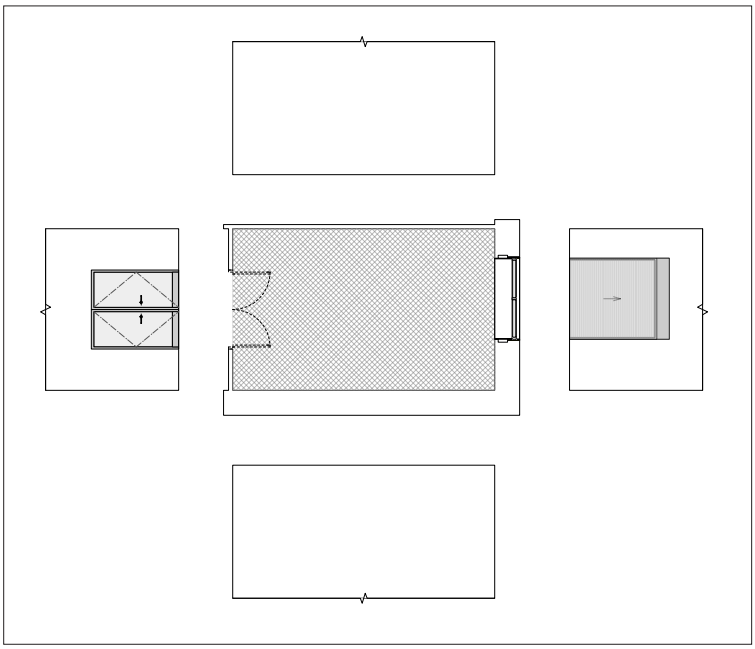

End of Section